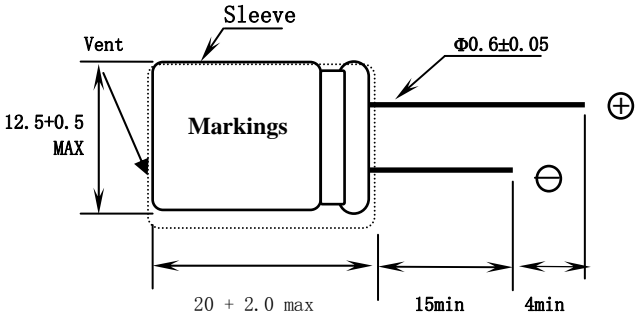
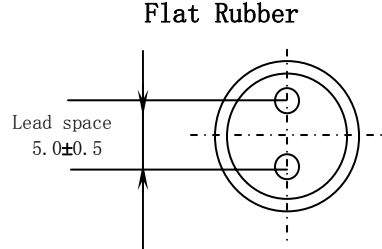


Aluminum Electrolytic Capacitor Specification

Series	KR1	35 V 1000 μ F	Part No.	KR1-035V102MH200-T/A5.0
Customer No.	/		Case size	Φ D 12.5 X L 20
Specification	Items		Standard	
	Operating temperature range		- 40 ~ + 85 $^{\circ}$ C	
	Capacitance tolerance		\pm 20% (20 $^{\circ}$ C , 120Hz)	
	Dissipation factor (MAX)		(Less than) 0.32 (20 $^{\circ}$ C , 120Hz)	
	Leakage current (MAX)		(Less than) 350 μ A (20 $^{\circ}$ C 35 V 2 min)	
	Impedance (MAX)		\	
	Ripple current (MAX)		1145 mArms (120Hz , 85 $^{\circ}$ C)	
	Load life		2000 hrs	
Outline	Sleeve color		Black	
	Marking color		White	
	(Dimensions)			
	<div style="display: flex; justify-content: space-around; align-items: flex-start;"> <div style="text-align: center;"> <p>Copper clad steel wire(tinned)</p>  </div> <div style="text-align: center;"> <p>Flat Rubber</p>  </div> </div> <p style="text-align: center;">[Remarks:Taping space:5.0(+0.8-0.2)]</p> <p style="text-align: center;">(unit):mm</p>			
Recorder	(The first edition) : 2016-10-31			
Wrote by: LUOLI		Checked by: DINGCHANGHUA		Approved by: SHENZHIHONG