


MINIATURE ALUMINUM ELECTROLYTIC CAPACITORS

RB High Temperature, For 125°C Use Series


- Load life of 2000 hours at 125°C
- Low impedance at high frequency
- For Electronic Control Unit and other high temperature applications
- Complied to the RoHS directive

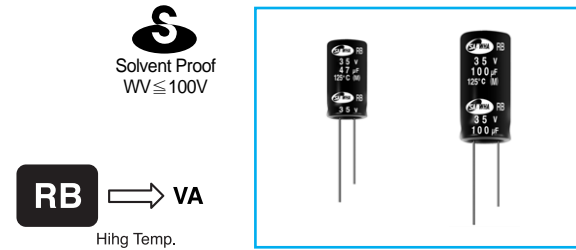

Item	Characteristics																		
Operating temperature range	WV ≤ 50: -55 ~ +125°C, WV ≥ 63: -40 ~ 125°C																		
Leakage current max.	WV ≤ 50: I = 0.01CV or 3μA whichever is greater (after 2 minutes) WV ≥ 63: 0.03CV + 10μA (after 5 min.)																		
Capacitance tolerance	±20% at 120Hz, 20°C																		
Dissipation factor max. (at 120Hz, 20°C)	When the capacitance exceeds 1000μF, 0.02 for each 1000μF increase. <table border="1"> <tr> <td>Rated Voltage(V)</td> <td>6.3</td> <td>10</td> <td>16</td> <td>25</td> <td>35</td> <td>50</td> <td>63 ~ 100</td> <td>160 ~ 250</td> </tr> <tr> <td>tanδ</td> <td>0.22</td> <td>0.19</td> <td>0.16</td> <td>0.14</td> <td>0.12</td> <td>0.10</td> <td>0.08</td> <td>0.15</td> </tr> </table>	Rated Voltage(V)	6.3	10	16	25	35	50	63 ~ 100	160 ~ 250	tanδ	0.22	0.19	0.16	0.14	0.12	0.10	0.08	0.15
Rated Voltage(V)	6.3	10	16	25	35	50	63 ~ 100	160 ~ 250											
tanδ	0.22	0.19	0.16	0.14	0.12	0.10	0.08	0.15											
Low temperature characteristics (Impedance ratio at 120Hz)	<table border="1"> <tr> <td>WV</td> <td>6.3 ~ 10</td> <td>16 ~ 250</td> </tr> <tr> <td>Z-25°C/Z+20°C</td> <td>3</td> <td>2</td> </tr> <tr> <td>Z-40°C/Z+20°C</td> <td>5</td> <td>4</td> </tr> </table>	WV	6.3 ~ 10	16 ~ 250	Z-25°C/Z+20°C	3	2	Z-40°C/Z+20°C	5	4									
WV	6.3 ~ 10	16 ~ 250																	
Z-25°C/Z+20°C	3	2																	
Z-40°C/Z+20°C	5	4																	
Load life (after application of the rated voltage for 2000 hours at 125°C)	<table border="1"> <tr> <td>Leakage current</td> <td>Less than specified value</td> </tr> <tr> <td>Capacitance change</td> <td>Within ±20% of initial value</td> </tr> <tr> <td>tanδ</td> <td>Less than 300% of specified value</td> </tr> </table> <p>Ø5, 6.3 and WV ≥ 100 products are for 1000 hours</p>	Leakage current	Less than specified value	Capacitance change	Within ±20% of initial value	tanδ	Less than 300% of specified value												
Leakage current	Less than specified value																		
Capacitance change	Within ±20% of initial value																		
tanδ	Less than 300% of specified value																		
Shelf life (at 125°C)	After 1000 hours no load test, leakage current, capacitance and tanδ are same as load life value.																		

DRAWING

Unit : mm

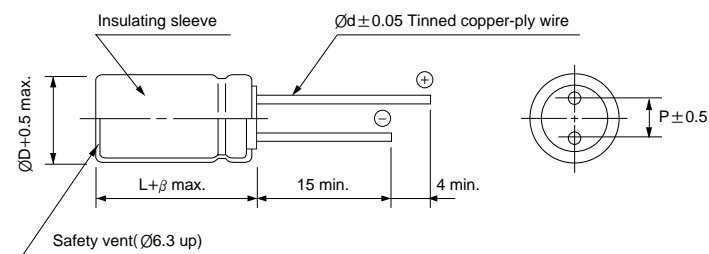

ØD	5	6.3	8	10	12.5	16	18
P	2.0	2.5	3.5	5.0	5.0	7.5	7.5
Ød	0.5	0.5	0.6	0.6	0.6	0.8	0.8
β	1.5			2.0			

MINIATURE ALUMINUM ELECTROLYTIC CAPACITORS



RB series

DIMENSIONS & MAXIMUM PERMISSIBLE RIPPLE CURRENT

WV Item μF	6.3			10			16		
	ØD×L (mm)	Impedance (Ω)max. 20°C 100kHz	Ripple current (mA rms) 125°C 100kHz	ØD×L (mm)	Impedance (Ω)max. 20°C 100kHz	Ripple current (mA rms) 125°C 100kHz	ØD×L (mm)	Impedance (Ω)max. 20°C 100kHz	Ripple current (mA rms) 125°C 100kHz
33									
47							5×11	1.0	124
68				5×11	1.0	124	6.3×11	0.65	176
100	5×11	1.1	120	6.3×11	0.71	168	6.3×11	0.45	212
150	6.3×11	0.64	180	6.3×11	0.45	212	8×11.5	0.30	310
220	6.3×11	0.39	228	8×11.5	0.31	310	8×11.5	0.21	368
330	8×11.5	0.26	234	8×11.5	0.21	368	10×12.5	0.16	500
470	10×12.5	0.18	460	10×12.5	0.17	480	10×16	0.12	616
680	10×16	0.14	560	10×16	0.12	616	10×20	0.085	816
1000	10×20	0.097	760	10×20	0.078	848	12.5×20	0.061	1129
1500	10×25	0.071	976	12.5×20	0.059	1134	12.5×25	0.047	1328
2200	12.5×20	0.056	1150	12.5×25	0.044	1368	16×20	0.043	1440
3300	12.5×25	0.044	1368	16×20	0.040	1480	16×25	0.035	1676
4700	16×25	0.042	1548	16×31.5	0.030	1936	16×35.5	0.026	2144
6800	16×31.5	0.031	1896	16×35.5	0.026	2144	18×35.5	0.023	2320
10000	16×40	0.026	2200	18×40	0.022	2432			
15000	18×40	0.023	2368						

WV Item μF	25			35			50		
	ØD×L (mm)	Impedance (Ω)max. 20°C 100kHz	Ripple current (mA rms) 125°C 100kHz	ØD×L (mm)	Impedance (Ω)max. 20°C 100kHz	Ripple current (mA rms) 125°C 100kHz	ØD×L (mm)	Impedance (Ω)max. 20°C 100kHz	Ripple current (mA rms) 125°C 100kHz
1.0							5×11	5.2	29
1.5							5×11	4.9	36
2.2							5×11	4.5	43
3.3							5×11	3.9	53
4.7							5×11	2.9	65
6.8							5×11	2.3	73
10							5×11	1.8	92
15							5×11	1.2	116
22				5×11	0.97	128	6.3×11	0.84	156
33	5×11	1.0	124	6.3×11	0.64	180	6.3×11	0.56	192
47	6.3×11	0.72	168	6.3×11	0.44	216	8×11.5	0.39	275
68	6.3×11	0.47	208	8×11.5	0.31	307	8×11.5	0.26	328
100	8×11.5	0.31	306	8×11.5	0.21	368	10×16	0.21	465
150	8×11.5	0.21	368	10×12.5	0.16	500	10×20	0.13	656
220	10×12.5	0.17	480	10×16	0.12	616	10×25	0.098	832
330	10×16	0.12	600	10×20	0.078	848	12.5×20	0.072	1025
470	10×20	0.084	816	12.5×20	0.060	1121	12.5×25	0.057	1200
680	12.5×20	0.060	1114	12.5×25	0.047	1328	16×20	0.052	1304
1000	12.5×25	0.047	1328	16×20	0.044	1416	16×31.5	0.039	1696
1500	16×20	0.044	1416	16×31.5	0.036	1908	16×40	0.034	1928
2200	16×25	0.036	1641	16×35.5	0.026	2144	18×40	0.031	2048
3300	16×35.5	0.026	2144	18×40	0.022	2432			
4700	18×40	0.023	2368						

MINIATURE ALUMINUM ELECTROLYTIC CAPACITORS

RB series

● DIMENSIONS & MAXIMUM PERMISSIBLE RIPPLE CURRENT

WV Item μ F	63		100		160	
	\varnothing D×L (mm)	Ripple current (mA rms) 125°C 100kHz	\varnothing D×L (mm)	Ripple current (mA rms) 125°C 100kHz	\varnothing D×L (mm)	Ripple current (mA rms) 125°C 100kHz
0.47	8×11.5	13	8×11.5	13	10×12.5	10
1.0	8×11.5	19	8×11.5	19	10×12.5	15
2.0	8×11.5	28	10×12.5	33	10×16	24
3.3	8×11.5	34	10×16	44	10×16	32
4.7	8×11.5	41	10×16	52	10×20	38
10	8×11.5	60	10×20	83	12.5×20	66
22	10×16	113	12.5×25	157	16×25	118
33	10×20	151	16×25	214	16×31.5	158
47	12.5×20	211	16×31.5	279		
100	12.5×25	336				

WV Item μ F	200		250	
	\varnothing D×L (mm)	Ripple current (mA rms) 125°C 100kHz	\varnothing D×L (mm)	Ripple current (mA rms) 125°C 100kHz
0.47	10×12.5	10	10×12.5	10
1.0	10×12.5	15	10×12.5	14
2.0	10×16	24	10×16	24
3.3	10×20	32	10×20	32
4.7	10×20	38	12.5×20	45
10	12.5×20	72	16×25	79
22	16×31.5	129		