
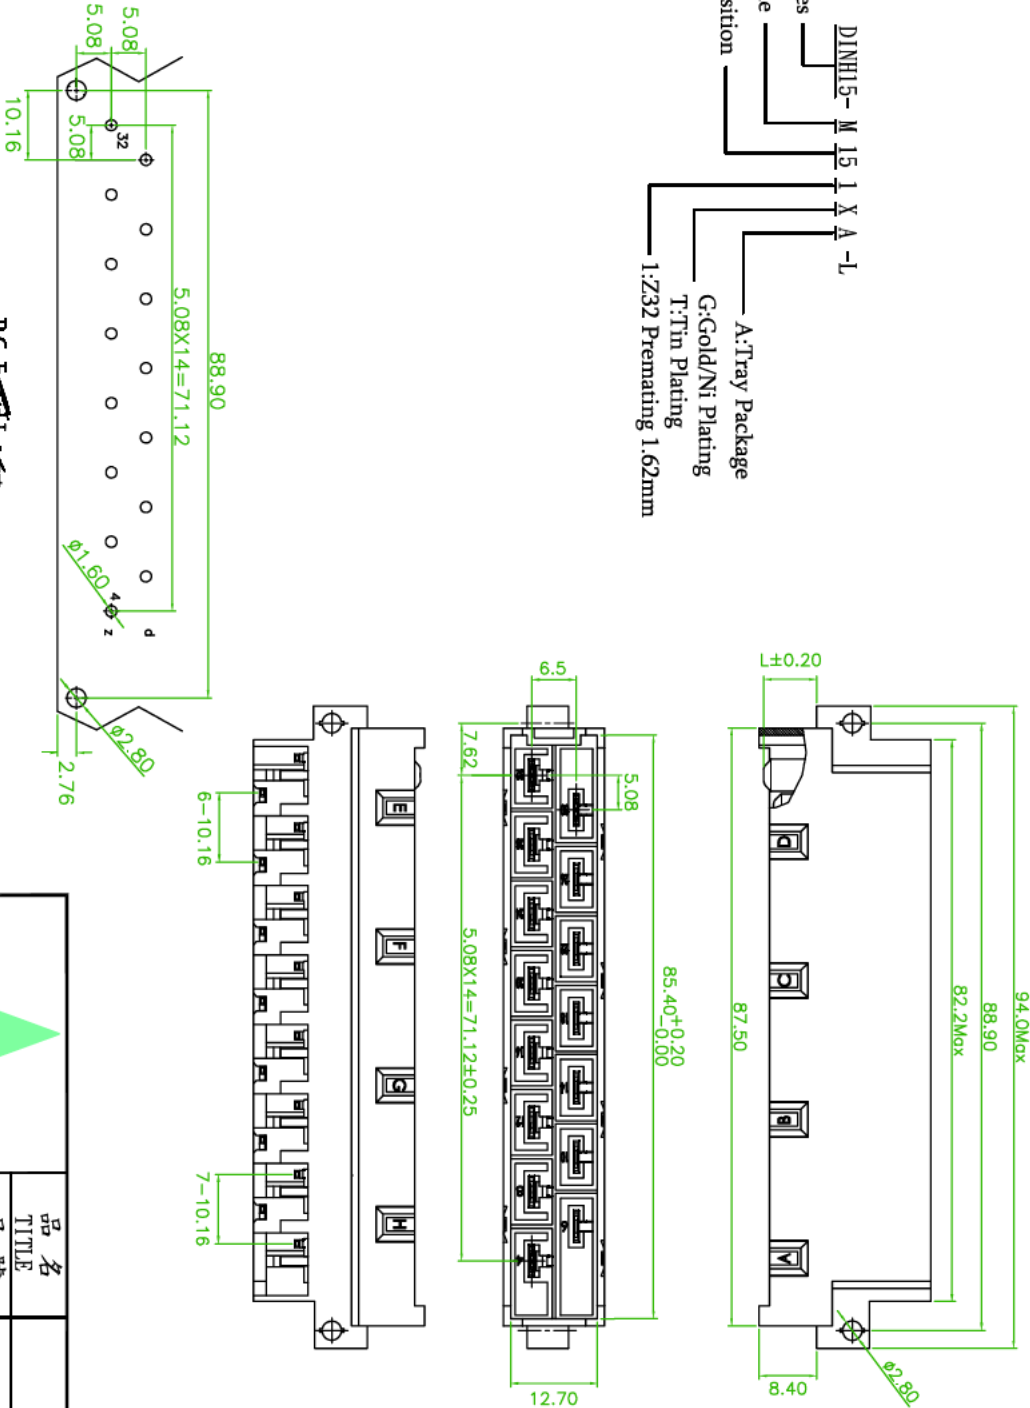


Specifications

Insulation Resistance:1000MΩ Min. At DC 500V.
Current Rating:15 Amp.
Dielectric Withstanding Voltage:AC 3100V For 1 minute.
Contact Resistance:8mΩ Max. at DC 100mA.
Operation Temperature:-55°C to +105°C

Material

Housing:Thermoplastic Polyester Glass Filled (UL94V-0)
Contacts:Copper Alloy

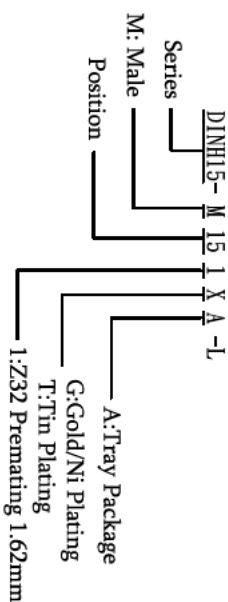

CONTACTS No.	L
Z4,Z8,Z12,Z16,Z20,Z24,Z28	6.00
Z32	7.65
d6,d10,d14,d18,d22,d26,d30	6.00

P.C. E-mail: jay@amtek.com

(Tolerance: ±0.05)

AREA	REV.	DESCRIPTION	DATE

Amtek Technology Co., Ltd.			
TEL: 886-5-2268-8035			
FAX: 886-5-2268-8033			
品名			
TITLE			
DIN H15-M 15 1 X A -L			
品號			
PART NO.			
圖號			
DRAWING NO.			
DIN H15-M 15 1 X A -L			
客戶品號			
CUSTOMER P/N			
公差			
TOLERANCE			
.X ±0.25			
.XX ±0.15			
單位			
UNIT			
mm			
核對			
CHECKED			
核准			
APPROVED			
James			