

Material:

Housing: 30% Glass filled PBT UL94V-0.

Contacts: Phosphor Bronze.

Electrical Characteristics:


Current Rating: 15 AMP.

Dielectric Withstanding Voltage: AC3100V For 1 minute.







Insulator Resistance: 1000MΩ min. at DC 500V.

Contact Resistance: 8mΩ max. at DC 100mA.

Operating Temperature: -55°C ~ +105°C.

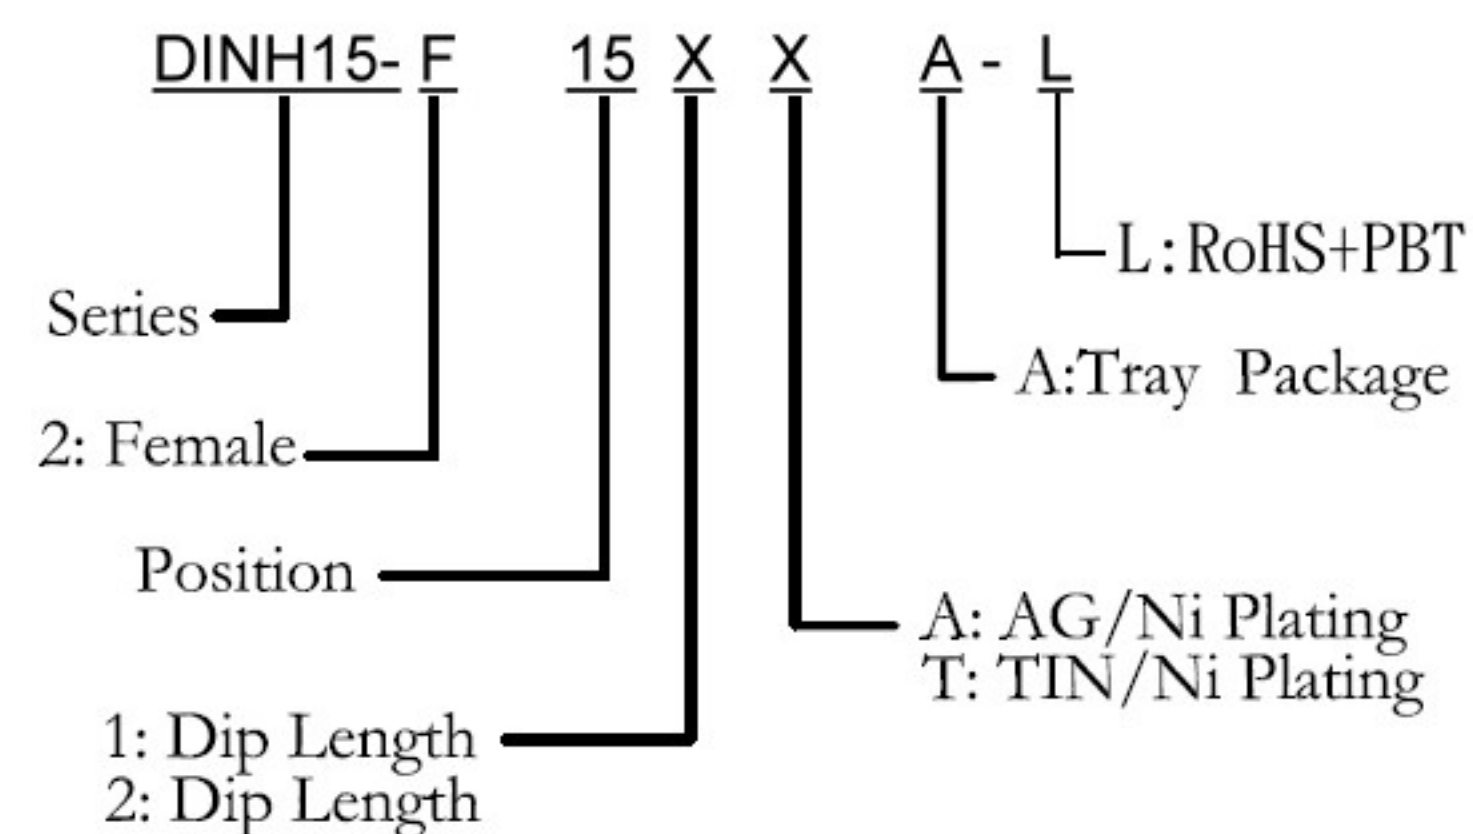***RoHS Compliant**

X Plating	A	T
	Ag/Ni	Tin/Ni
X length	1	2
	4.00	10.00

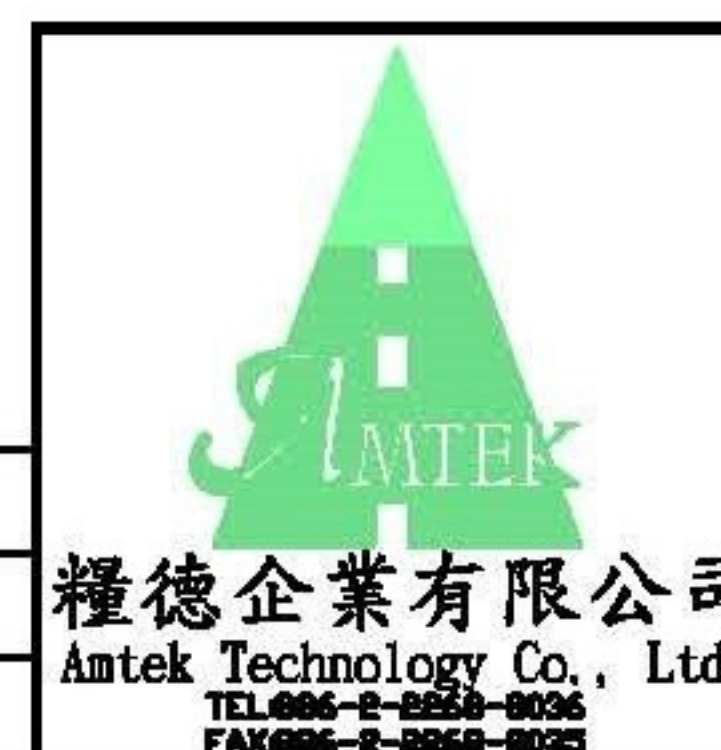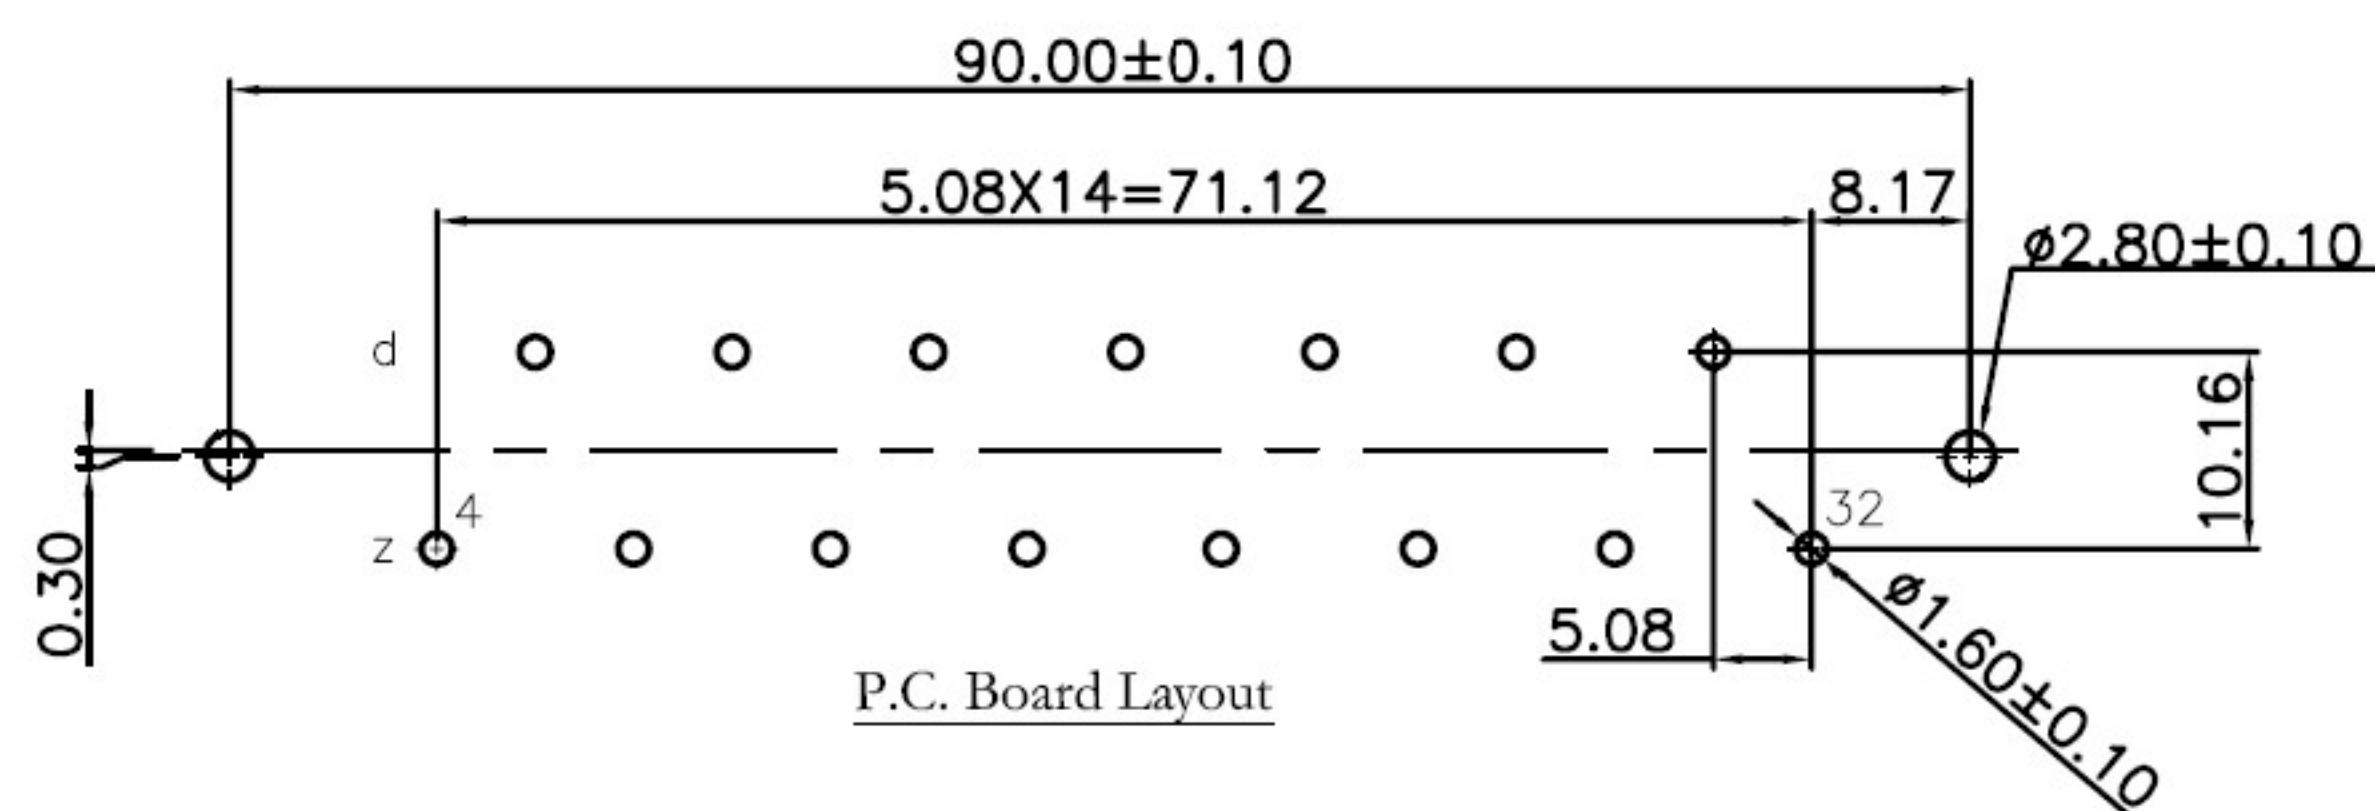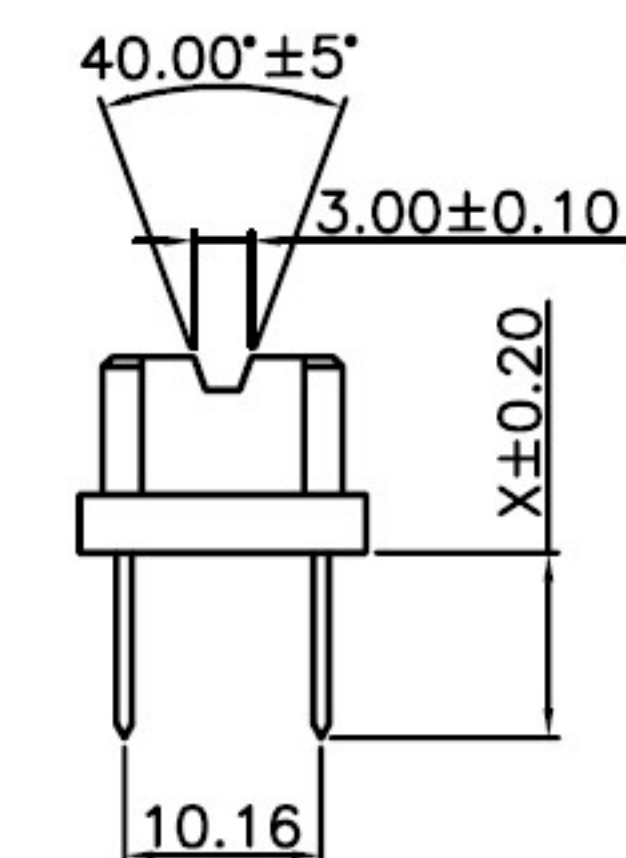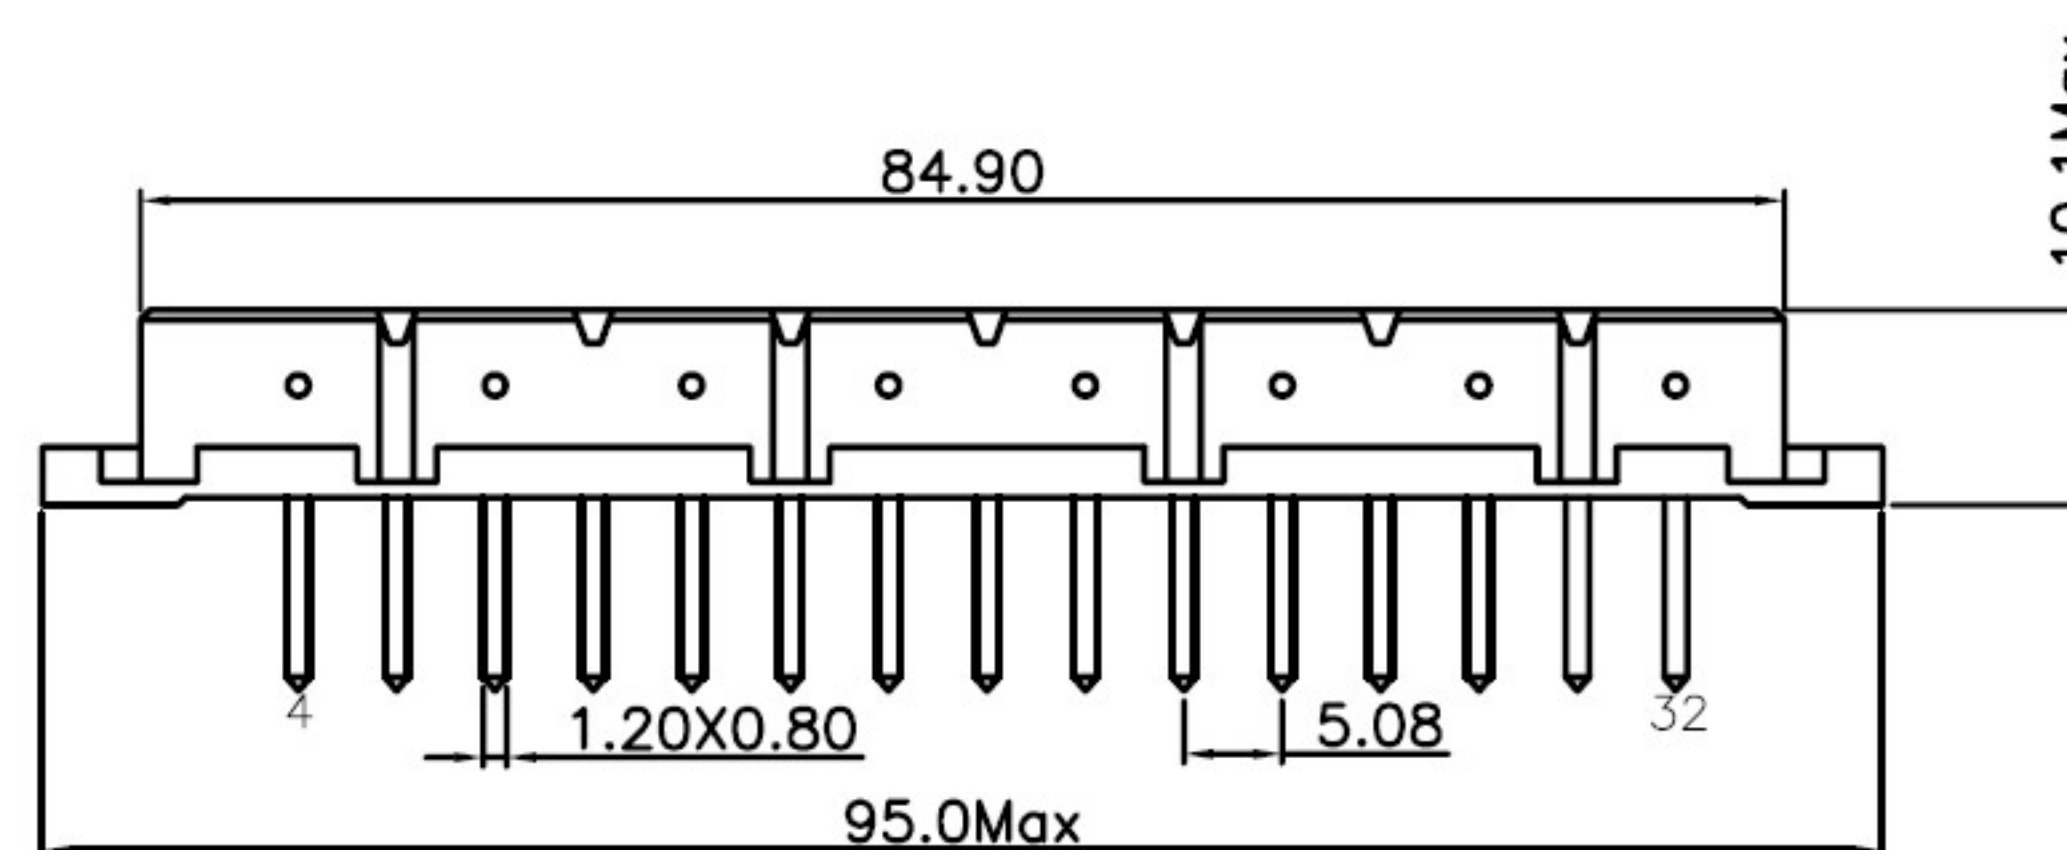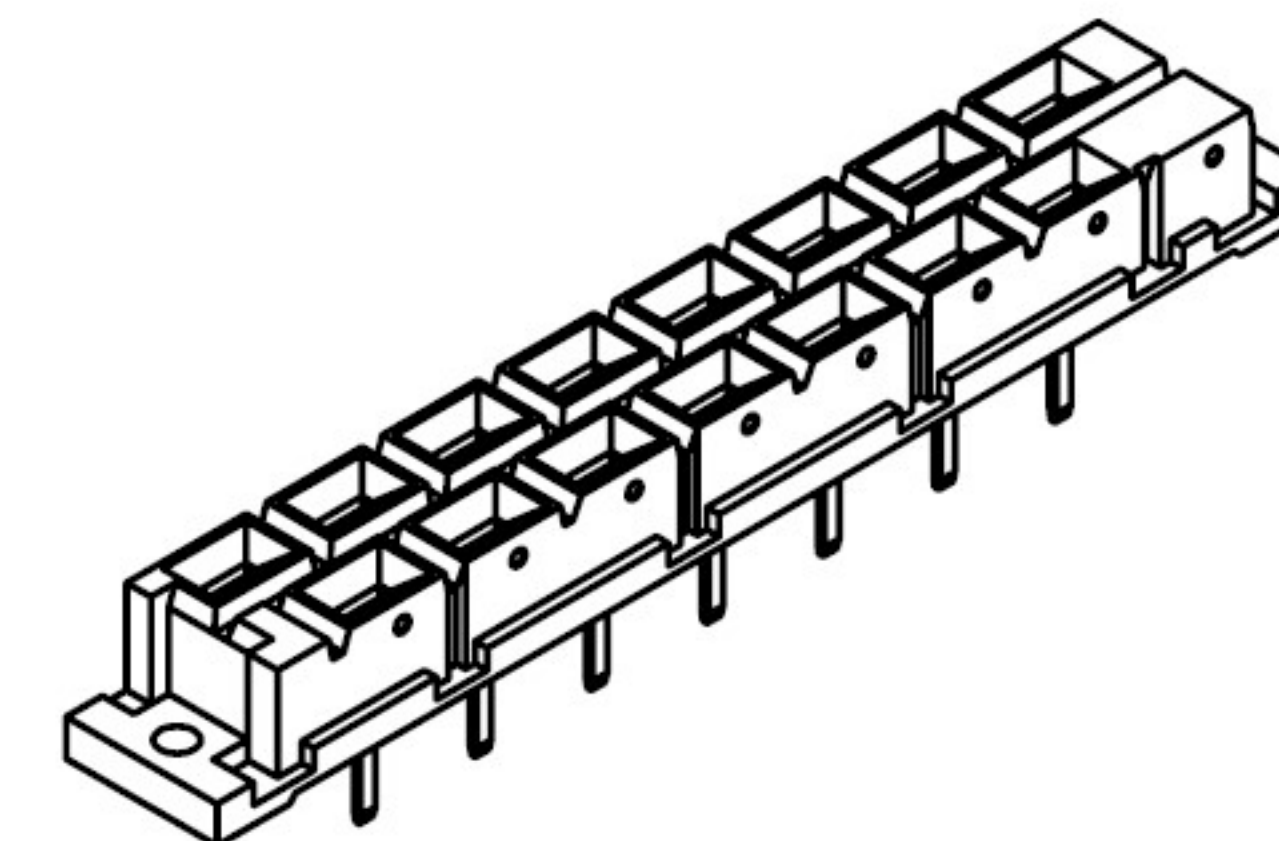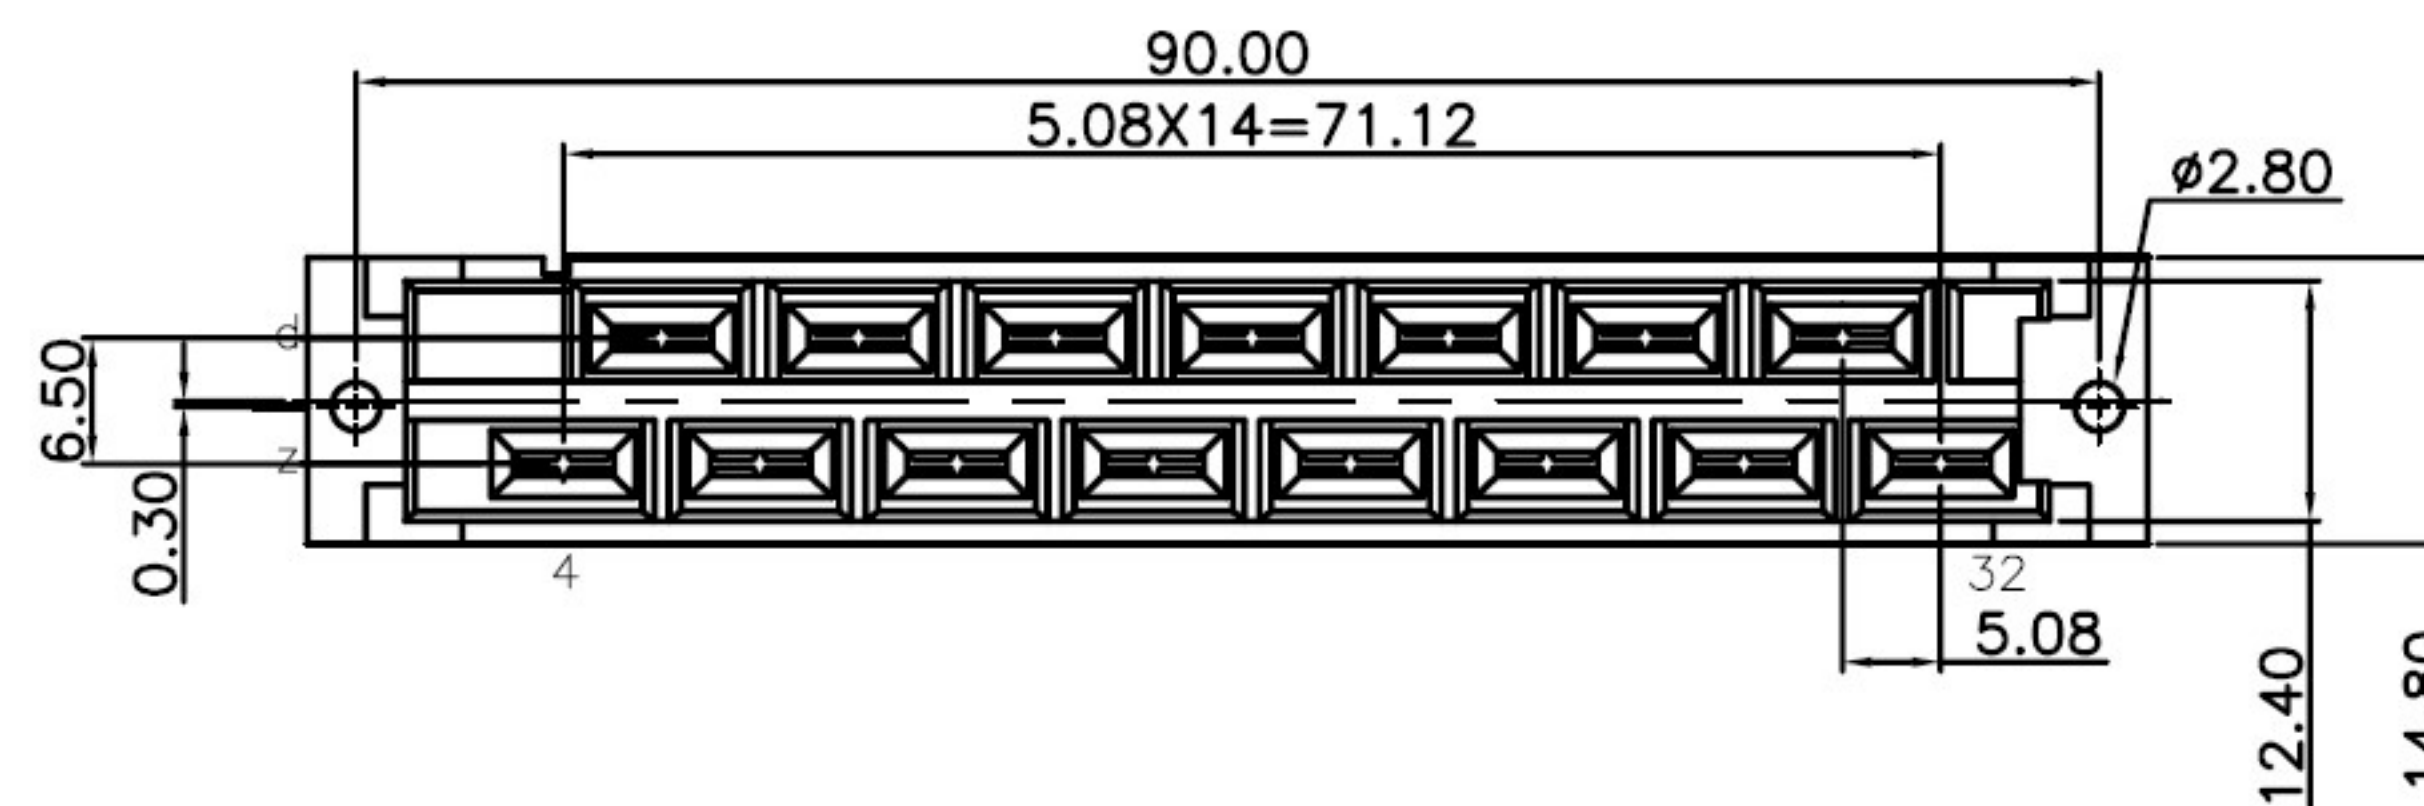

品名 TITLE	DIN41612 H15 FEMALE TYPE			
品號 PART NO.	DINH15-F15-L			日期 DATE
圖號 DRAWING NO.	版本 REV.	A	繪圖 DRAWN	Sinnys
客戶品號 CUSTOMER P/N	比例 SCALE	FREE	核對 CHECKED	Nikki
公差 TOLERANCE	.X ±0.25 .XX ±0.15	單位 UNIT	mm	核准 APPROVED
				James

AREA	REV.	DESCRIPTION	DATE