



EI48/20.5 12VA

Özellikleri

VDE 0570 / EN 61558 Normuna
Göre Vakum Dolgulu İki Bölmeli
Sarımlı İzolasyon Sınıfı 70° C/B
Ağırlığı 300 Gr.

Characteristic

According to VDE 0570 / EN 61558
Potted under vacuum Split-Bobbin
winding Insulation Class ta 70° C/B
Weight 300 Gr.

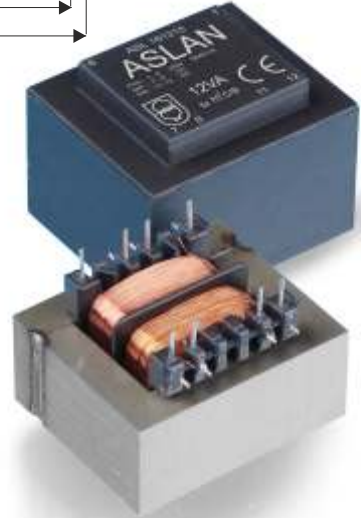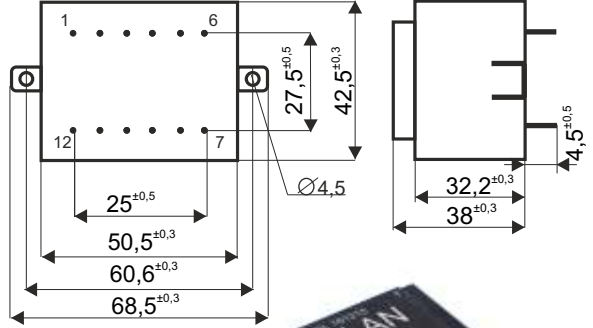

SİPARİŞ KODU Order No.	PRİMER [V] Primary	SEKONDER [V] Secondary	AKIM [mA] Current	PİM ARALIĞI Pim	BOŞTAKİ VOLTAJI [V] No-Load Voltage
ASL 161106	230V~	6	2000	1 - 6 / 8 - 11	7,2
ASL 161108	230V~	7,5	1600	1 - 6 / 8 - 11	9,3
ASL 161109	230V~	9	1333	1 - 6 / 8 - 11	10,8
ASL 161112	230V~	12	1000	1 - 6 / 8 - 11	14,4
ASL 161115	230V~	15	800	1 - 6 / 8 - 11	18,0
ASL 161118	230V~	18	666	1 - 6 / 8 - 11	21,6
ASL 161124	230V~	24	500	1 - 6 / 8 - 11	28,8
ASL 161206	230V~	2 x 6	2 x 1000	1-6/7-8,11-12	2 x 7,3
ASL 161208	230V~	2 x 7,5	2 x 300	1-6/7-8,11-12	2 x 9,3
ASL 161209	230V~	2 x 9	2 x 666	1-6/7-8,11-12	2 x 11,0
ASL 161212	230V~	2 x 12	2 x 500	1-6/7-8,11-12	2 x 14,6
ASL 161215	230V~	2 x 15	2 x 400	1-6/7-8,11-12	2 x 18,2
ASL 161218	230V~	2 x 18	2 x 333	1-6/7-8,11-12	2 x 21,8
ASL 161224	230V~	2 x 24	2 x 250	1-6/7-8,11-12	2 x 29,9