




# DEGSON ELECTRONICS CO., LTD.


## Product Specification



<b>Approval</b>		
<b>Electrical Standard</b>	<b>UL</b>	<b>IEC</b>
Rated voltage	300V	450V
Rated current	20A	32A
Wire range	22-12AWG	4.0mm <sup>2</sup>
With standing voltage	AC2000V/1Min	
Insulation Resistance	500MΩ/DC500V	
<b>Mechanical</b>		
Max. Torque Value	1.2N.m 10.6Lb.in	
Ambient temperature	-40℃~+105℃	
<b>Dimensions</b>		
Pitch	10.0mm(.394")	
Poles	2P-24P	
<b>Material</b>		
Housing	PA66,UL94V-0	
Terminal	Brass,0.8t,Tin Plated	
Screws	Steel,M4 Ni Plated	

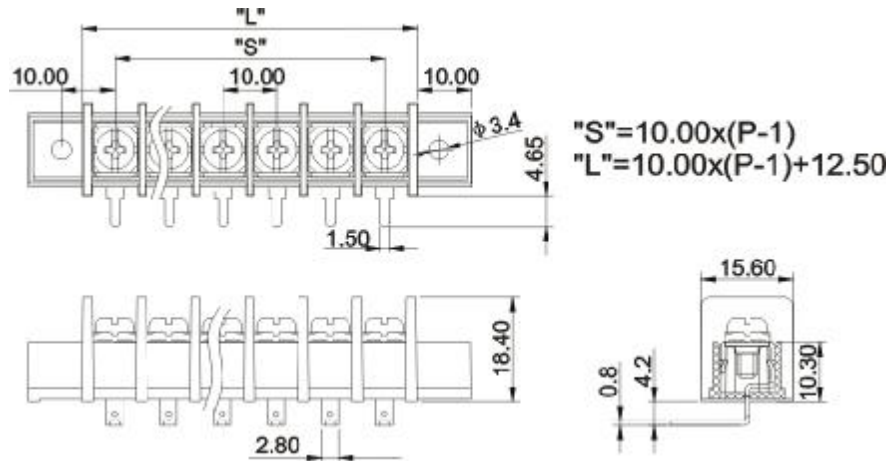

### HOW TO ORDER :

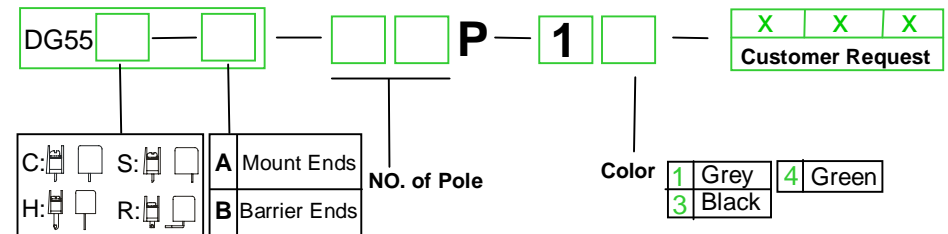

<b>Poles</b>	2	3	4	5	6	7	8	9	10	11	12	13	14	15
<b>L(mm)</b>	22.50	32.50	42.50	52.50	62.50	72.50	82.50	92.50	102.50	112.50	122.50	132.50	142.50	152.50
<b>S(mm)</b>	10.00	20.00	30.00	40.00	50.00	60.00	70.00	80.00	90.00	100.00	110.00	120.00	130.00	140.00
<b>Poles</b>	16	17	18	19	20	21	22	23	24	25	26	27	28	
<b>L(mm)</b>	162.50	172.50	182.50	192.50	202.50	212.50	222.50	232.50	242.50	252.50	262.50			
<b>S(mm)</b>	15.00	16.00	17.00	18.00	19.00	20.00	21.00	22.00	23.00	24.00	25.00			

	<b>DEGSON ELECTRONICS CO., LTD.</b>
	<b>NAME</b> <b>DG55R-A</b>