

REV.	DESCRIPTION	DRAWN	CHECKED	APPROVED
A	NEW RELEASE	LJH 04/27/05'	~	LJC 12/08/06'
B	整理图纸	YCH 07/27/11'	~	

NOTES:

1. MATERIAL


- 1.1 INSULATOR: THERMOPLASTIC (UL 94V-0).
- 1.2 CONTACT: COPPER ALLOY.

2. SPECIFICATION

- 2.1 TEMPERATURE RANGE: -40~+105°C.
- 2.2 CONTACT RESISTANCE: 20mΩ max.
- 2.3 INSULATION RESISTANCE: 1000MΩ min.
- 2.4 DIELECTRIC WITHSTANDING VOLTAGE: AC 500V PER MINUTE.

3. PART NUMBER: DS1017

- DS1017- X X X X X
- HOUSING COLOR
 - G: GRAY
 - B: BLACK
 - L: BLUE
 - CONTACT PLATING
 - 8: FULL GOLD FLASH
 - 6: FULL TIN
 - 2: NICKEL+GOLD FLASH
 - POLARIZATION
 - A: W/O
 - B: W/O
 - STRAIN RELIEF
 - M: W/O
 - N: W/O
 - No. OF CONTACTS
 - 10 12 16 20 22 24 26 30
 - 34 36 40 44 50 56 68

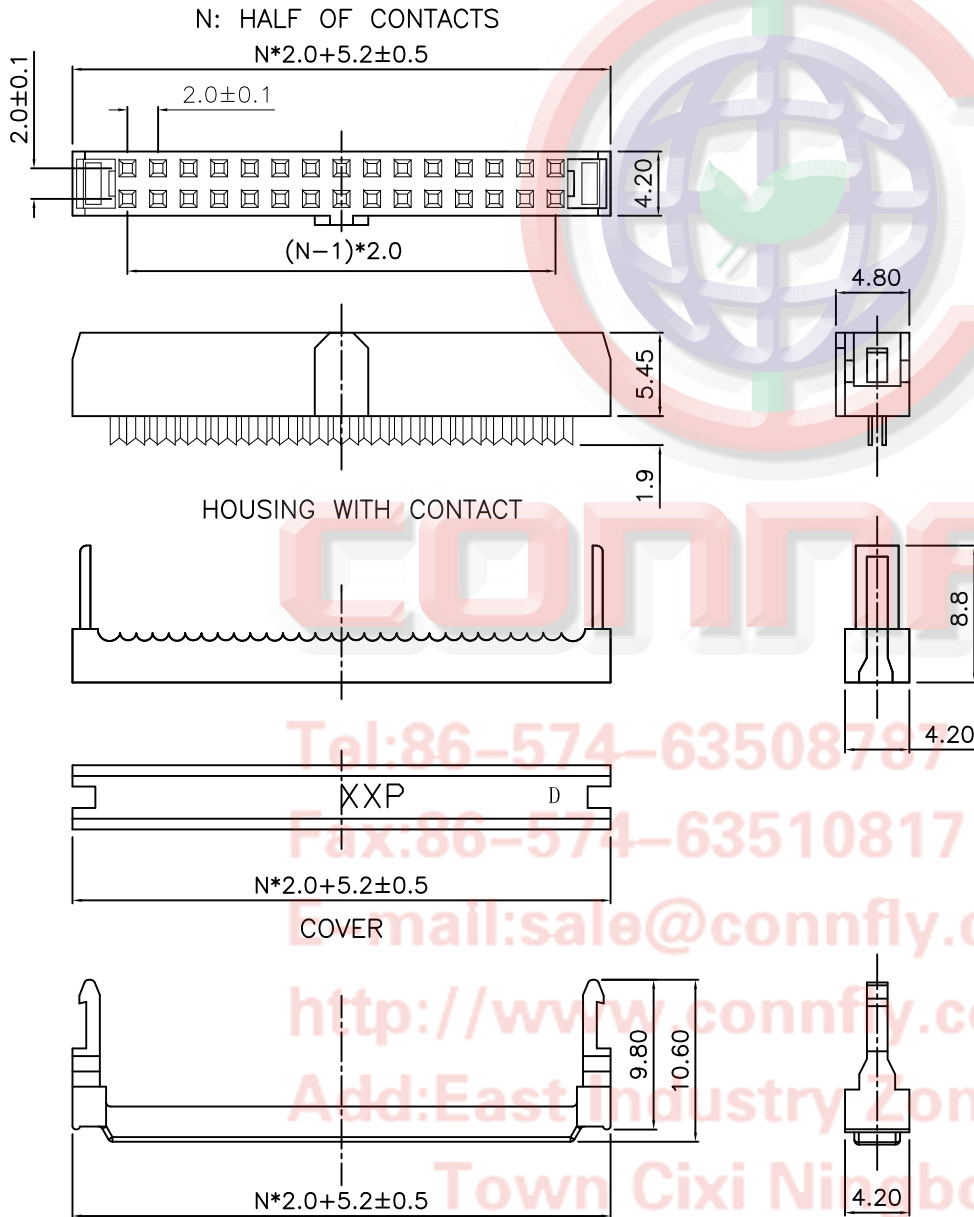

Tel: 86-574-63508787
 Fax: 86-574-63510817
 Email: sale@connfly.com
 http://www.connfly.com
 Add: East Industry Zone, Kuang Ya
 Town Cixi Ningbo China
 P.C: 315333

GENERAL TOLERANCE		ANGLE TOLERANCE		PROJECTION	TITLE	IDC SOCKET PITCH 2.0mm WITH 1.0mm FLAT CABLE	
X.	±0.60	X.	±5°	UNITS	mm		
.X	±0.38	.X	±3°	SHEET SIZE	A4	SERIES	DS1017 SERIES
.XX	±0.25	.XX	±2°	晨翔电子有限公司 CONNFLY CONNFLY ELECTRONIC CO., LTD			
DRAWING TYPE		CUSTOMER					
SCALE	1:1	SHEET	1 OF 1				
DRAWING NO.		C-DS1017-XXXXX					