



SPECIFICATION FOR APPROVAL

CUSTOMER :	DATE :
PART NO : LFU20V-182	DWG.NO : TD1270610
CUSTOMER PART NO :	CUST.DWG.NO :

(1) UNIT: mm

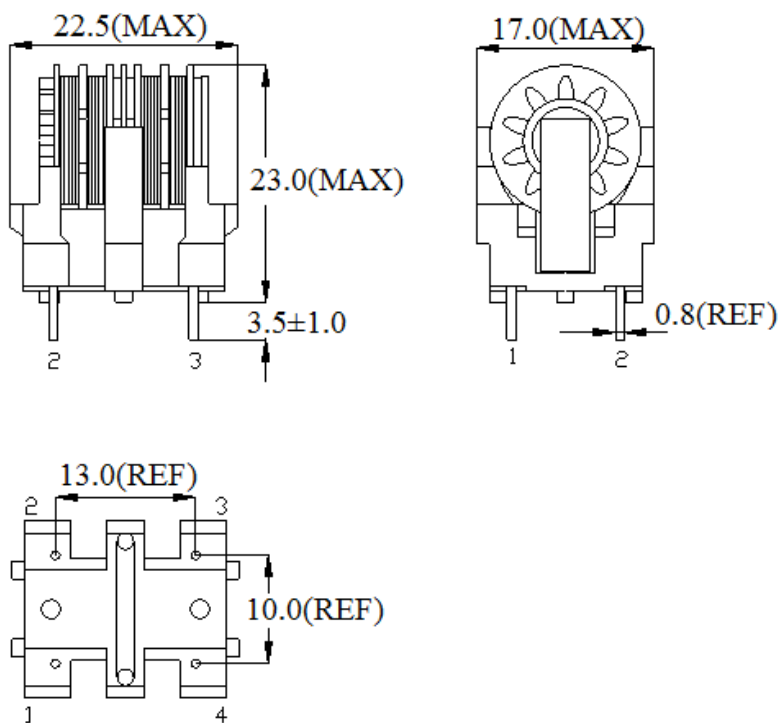

(2) SCHEMATIC:

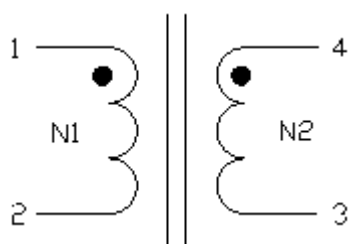

DRAWN BY	CHECKED BY	APPROVED BY
Vicky	張明德	吳載敏

CORE MASTER ENTERPRISE CO., LTD.
 TEL:886-2-8919-1288 FAX:886-2-8919-1298 WEB:www.coremaster.com.tw

SPECIFICATION FOR APPROVAL

CUSTOMER :		DATE :	
PART NO : LFU20V-182		DWG.NO : TD1270610	
CUSTOMER PART NO :		CUST.DWG.NO :	
PARAMETER	TERMINAL	SPECIFICATION	TEST INSTRUMENTS
INDUCTANCE	L (1-2)=(4-3)	1.8mH (MIN)	10KHz/0.1V
RDC(Ω)	RDC(1-2)=(4-3)	0.12 (MAX)	25°C
IDC(A)	IDC(1-2)=(4-3)	1.5 (MAX)	
HI-POT	PIN1-PIN4	AC 1.5KV/5mA/1SEC	
	PIN1,4-CORE	AC 1.0KV/5mA/1SEC	
MATERIAL	SPEC	SUPPLIER	REMARK
CORE	UT20 R12K	VAKOS/EQU	
BOBBIN	UT20 PLENOLIC T375J	CHANGCHUN / EQU	
WIRE	2UEW ϕ 0.45mm	TAI-I / EQU	
WINDING	36TS(REF)		
DRAWN BY Vicky		CHECKED BY 張明德	APPROVED BY 吳載敏

CORE MASTER ENTERPRISE CO., LTD.

TEL:886-2-8919-1288 FAX:886-2-8919-1298 WEB:www.coremaster.com.tw

SPECIFICATION FOR APPROVAL

CUSTOMER :			DATE :		
PART NO : LFU20V-182			DWG.NO : TD1270610		
CUSTOMER PART NO :			CUST.DWG.NO :		
繞組	START	END	WIRE SIZE	TURNS(TS)	TAPE(TS)
N1	1	2	ϕ 0.45	36 (REF)	
N2	4	3	ϕ 0.45	36 (REF)	
DRAWN BY		CHECKED BY		APPROVED BY	
Vicky		張明德		吳載敏	

CORE MASTER ENTERPRISE CO., LTD.

TEL:886-2-8919-1288 FAX:886-2-8919-1298 WEB:www.coremaster.com.tw