

Sample &

Buy



#### uA78M05, uA78M06, uA78M08 uA78M09, uA78M10, uA78M12, uA78M33

Support &

Community

2.2

SLVS059T - JUNE 1976-REVISED JANUARY 2015

# µA78Mxx Positive-Voltage Regulators

Technical

Documents

## 1 Features

- 3-Terminal Regulators
- Output Current up to 500 mA
- No External Components
- Internal Thermal-Overload Protection
- High Power-Dissipation Capability
- Internal Short-Circuit Current Limiting
- Output Transistor Safe-Area Compensation

# 2 Applications

- On-Card Regulation
- Portable Devices
- Computing & Servers
- Telecommunications

# 3 Description

Tools &

Software


This series of fixed-voltage integrated-circuit voltage regulators is designed for a wide range of applications. The applications include on-card regulation for elimination of noise and distribution problems associated with single-point regulation. Each of these regulators can deliver up to 500 mA of output current. The internal current-limiting and thermal-shutdown features of these regulators essentially make them immune to overload. In addition to use as fixed-voltage regulators, these devices can be used with external components to obtain adjustable output voltages and currents and also as the power-pass element in precision regulators.

#### Device Information<sup>(1)</sup>

PART NUMBER	PACKAGE	BODY SIZE (NOM)				
	SOT-223 (3)	6.50 mm x 3.50 mm				
UA78Mxx	TO-220 (3)	10.16 mm x 8.82 mm				
	TO-252 (3)	6.60 mm x 6.10 mm				

(1) For all available packages, see the orderable addendum at the end of the data sheet.

# **4** Simplified Schematic

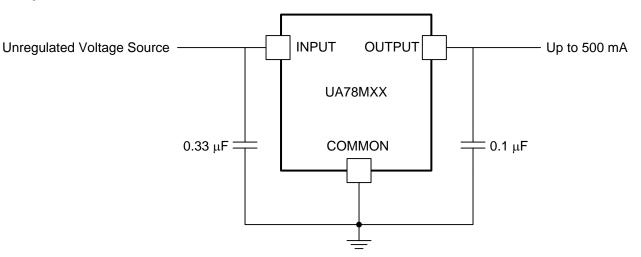

# **Table of Contents**

1	Feat	ures 1						
2	App	lications 1						
3	Desc	cription1						
4	Sim	olified Schematic1						
5	Revision History 2							
6		Configuration and Functions						
7	Spee	cifications 4						
	7.1	Absolute Maximum Ratings 4						
	7.2	ESD Ratings 4						
	7.3	Recommended Operating Conditions 4						
	7.4	Thermal Information 4						
	7.5	Electrical Characteristics — uA78M33C 5						
	7.6	Electrical Characteristics — uA78M33I 5						
	7.7	Electrical Characteristics — uA78M05C 6						
	7.8	Electrical Characteristics — uA78M05I 6						
	7.9	Electrical Characteristics — uA78M06C 7						
	7.10	Electrical Characteristics — uA78M08C 7						
	7.11	Electrical Characteristics — uA78M09C 8						
	7.12	Electrical Characteristics — uA78M10C 8						
	7.13	Electrical Characteristics — uA78M12C 9						

Changes from Revision S (May 2013) to Revision T

# **5** Revision History

2

•	Added Applications, Device Information table, Pin Functions table, ESD Ratings table, Thermal Information table, Typical Characteristics, Feature Description section, Device Functional Modes, Application and Implementation section, Power Supply Recommendations section, Layout section, Device and Documentation Support section, and Mechanical, Packaging, and Orderable Information section.					
Cł	nanges from Revision R (February 2013) to Revision S Page					
•	Removed Ordering Information table					
Cł	nanges from Revision Q (April 2010) to Revision R Page					
•	Removed obsolete part information from document					

www.ti.com

STRUMENTS


Page

XAS


	7.14	Typical Characteristics	9
8	Deta	iled Description	10
	8.1	Overview	10
	8.2	Functional Block Diagram	10
	8.3	Feature Description	10
	8.4	Device Functional Modes	10
9	App	lication and Implementation	11
	9.1	Application Information	11
	9.2	Typical Application	11
10	Pow	ver Supply Recommendations	13
11	Lay	out	13
	11.1		
	11.2	Layout Example	13
12	Dev	ice and Documentation Support	14
	12.1	Related Links	14
	12.2	Trademarks	14
	12.3	Electrostatic Discharge Caution	14
	12.4	Glossary	14
13	Мес	hanical, Packaging, and Orderable	
		mation	14





# 6 Pin Configuration and Functions



KCS (TO-220) PACKAG (TOP VIEW)







3

Pin Functions

	PIN	ТҮРЕ	DESCRIPTION
NAME	NO.	ITE	DESCRIPTION
COMMON	2	—	Ground
INPUT	1	I	Supply Input
OUTPUT	3	0	Voltage Output

# 7 Specifications

### 7.1 Absolute Maximum Ratings

over virtual junction temperature range (unless otherwise noted) <sup>(1)</sup>

		MIN	MAX	UNIT
VI	Input voltage		35	V
TJ	Operating virtual junction temperature		150	°C
T <sub>stg</sub>	Storage temperature range	-65	150	°C

(1) Stresses beyond those listed under Absolute Maximum Ratings may cause permanent damage to the device. These are stress ratings only, and functional operation of the device at these or any other conditions beyond those indicated under Recommended Operating Conditions is not implied. Exposure to absolute-maximum-rated conditions for extended periods may affect device reliability.

### 7.2 ESD Ratings

			VALUE	UNIT
		Human body model (HBM), per ANSI/ESDA/JEDEC JS-001, all pins <sup>(1)</sup>	2500	
V <sub>(ESD)</sub>	Electrostatic discharge	Charged device model (CDM), per JEDEC specification JESD22-C101, all $pins^{(2)}$	2000	V

(1) JEDEC document JEP155 states that 500-V HBM allows safe manufacturing with a standard ESD control process.

(2) JEDEC document JEP157 states that 250-V CDM allows safe manufacturing with a standard ESD control process.

### 7.3 Recommended Operating Conditions

			MIN	MAX	UNIT
		uA78M33	5.3	25	
		uA78M05	7	25	
	Input voltage	uA78M06	8	25	
VI		uA78M08	10.5	25	V
		uA78M09	11.5	26	
		uA78M10	12.5	28	
		uA78M12	14.5	30	
		uA78M15	17.5	30	
Ιo	Output current			500	mA
т	Operating virtual junction temperature	uA78MxxC	0	125	°C
ΤJ	Operating virtual junction temperature	uA78MxxI	-40	125	

#### 7.4 Thermal Information

		UA78Mxx					
	THERMAL METRIC <sup>(1)</sup>	DCY	КС	KCS	KTP	KVU	UNIT
		3 PINS	3 PINS	3 PINS	3 PINS	3 PINS	
$R_{\theta J A}$	Junction-to-ambient thermal resistance	53	19	19	28	30.3	
R <sub>θJC(to</sub>	Junction-to-case (top) thermal resistance	30.6	17	17	19	_	°C/W
R <sub>θJC(b</sub> ot)	Junction-to-case (bottom) thermal resistance	—	3	3	1.4	—	

(1) For more information about traditional and new thermal metrics, see the IC Package Thermal Metrics application report, SPRA953.

4

Product Folder Links: uA78M05 uA78M06 uA78M08 uA78M09 uA78M10 uA78M12 uA78M33



### 7.5 Electrical Characteristics — uA78M33C

at specified virtual junction temperature, V<sub>I</sub> = 8 V, I<sub>O</sub> = 350 mA, T<sub>J</sub> = 25°C (unless otherwise noted)

DADAMETEDA		TEST CONDIT		uA	78M330	;	UNIT
PARAMETER0		TEST CONDIT	IONS	MIN	TYP		UNIT
Output voltage <sup>(2)</sup>	$I_0 = 5 \text{ mA to } 350$	mA,		3.2	3.3	3.4	V
	$V_{1} = 8 V \text{ to } 20 V$		$T_J = 0^{\circ}C$ to $125^{\circ}C$	3.1	3.3	MAX 3.4 3.5 100 50 100 200 200 6 6	v
	L 200 mA		$V_{I} = 5.3 V \text{ to } 25 V$		9	100	m)/
Input voltage regulation	I <sub>O</sub> = 200 mA		$V_I = 8 V$ to 25 V		3	50	mV
Dipple rejection	$V_1 = 8 V \text{ to } 18 V$ ,		$I_0 = 100 \text{ mA}, T_J = 0^{\circ}\text{C} \text{ to } 125^{\circ}\text{C}$	62			٩D
Ripple rejection	f = 120 Hz		I <sub>O</sub> = 300 mA	62	80		dB
Output voltage regulation	V <sub>I</sub> = 8 V,		$I_{O} = 5 \text{ mA to } 500 \text{ mA}$		20	100	mV
Temperature coefficient of output voltage	I <sub>O</sub> = 5 mA,		$T_J = 0^{\circ}C$ to 125°C		-1		mV/°C
Output noise voltage	f = 10 Hz to 100 k	Hz			40	200	μV
Dropout voltage					2		V
Bias current					4.5	6	mA
Dies summent shares	I <sub>O</sub> = 200 mA,	$V_{I} = 8 V \text{ to } 25 V,$	$T_J = 0^{\circ}C$ to $125^{\circ}C$			0.8	0
Bias current change	$I_0 = 5 \text{ mA to } 350$	mA,	$T_J = 0^{\circ}C$ to $125^{\circ}C$			MAX 3.4 3.5 100 50 100 200 200 6 0.8	mA
Short-circuit output current	V <sub>1</sub> = 35 V				300		mA
Peak output current					700		mA

All characteristics are measured with a 0.33-µF capacitor across the input and a 0.1-µF capacitor across the output. Pulse-testing (1) techniques maintain  $T_J$  as close to  $T_A$  as possible. Thermal effects must be taken into account separately.

(2)This specification applies only for dc power dissipation permitted by Absolute Maximum Ratings.

### 7.6 Electrical Characteristics — uA78M33I

at specified virtual junction temperature, V<sub>I</sub> = 8 V, I<sub>O</sub> = 350 mA, T<sub>J</sub> = 25°C (unless otherwise noted)

DADAMETED		TEST CONDIT		uA	78M33	I	UNIT
PARAMETER		TEST CONDIT	IONS	MIN	TYP	MAX	UNIT
Output voltage <sup>(2)</sup>	$I_0 = 5 \text{ mA to } 350$	mA,		3.2	3.3	3.4	V
	$V_{I} = 8 V \text{ to } 20 V$		$T_J = -40^{\circ}C$ to $125^{\circ}C$	3.1	3.3	3.5	v
Insuit voltage regulation			$V_{I} = 5.3 V$ to 25 V		9	100	mV
Input voltage regulation	I <sub>O</sub> = 200 mA		$V_I = 8 V$ to 25 V		3	50	mv
Ripple rejection	$V_{I} = 8 V \text{ to } 18 V,$		I <sub>O</sub> = 100 mA, T <sub>J</sub> = −40°C to 125°C	62		MAX     Ul       3.4	dB
	f = 120 Hz		I <sub>O</sub> = 300 mA	62	80		
Output voltage regulation	V <sub>I</sub> = 8 V,		$I_{O} = 5 \text{ mA to } 500 \text{ mA}$		20	100	mV
Temperature coefficient of output voltage	I <sub>O</sub> = 5 mA,		$T_J = -40^{\circ}C$ to $125^{\circ}C$		-1		mV/°C
Output noise voltage	f = 10 Hz to 100 k	Hz			40	200	μV
Dropout voltage					2		V
Bias current					4.5	6	mA
Diag ourrest shange	I <sub>O</sub> = 200 mA,	$V_{I} = 8 V \text{ to } 25 V,$	$T_J = -40^{\circ}C$ to $125^{\circ}C$			0.8	~ ^
Bias current change	$I_{\rm O} = 5 \text{ mA to } 350$	mA,	$T_J = -40^{\circ}C$ to $125^{\circ}C$			0.5	mA
Short-circuit output current	V <sub>I</sub> = 35 V				300		mA
Peak output current					700		mA

All characteristics are measured with a 0.33-µF capacitor across the input and a 0.1-µF capacitor across the output. Pulse-testing (1) techniques maintain  $T_J$  as close to  $T_A$  as possible. Thermal effects must be taken into account separately. This specification applies only for dc power dissipation permitted by *Absolute Maximum Ratings*.

(2)

XAS

## 7.7 Electrical Characteristics — uA78M05C

at specified virtual junction temperature, V<sub>I</sub> = 10 V, I<sub>O</sub> = 350 mA, T<sub>J</sub> = 25°C (unless otherwise noted)

DADAMETED	TEST CONDITIONS <sup>(1)</sup>		uA78M05C				
PARAMETER	TEST CONDITIONS "			TYP	MAX	UNIT	
Output voltage <sup>(2)</sup>	$I_0 = 5 \text{ mA to } 350 \text{ mA},$		4.8	5	5.2 V		
Output voltage	$V_{1} = 7 V \text{ to } 20 V$	$T_J = 0^{\circ}C$ to $125^{\circ}C$	4.75		5.25	v	
	L 000 m A	$V_1 = 7 V$ to 25 V		3	100		
Input voltage regulation	I <sub>O</sub> = 200 mA	V <sub>I</sub> = 8 V to 25 V		1	50	mV	
Dinala seiseties	$V_1 = 8 V \text{ to } 18 V,$	$I_{O} = 100 \text{ mA}, T_{J} = 0^{\circ}\text{C} \text{ to } 125^{\circ}\text{C}$	62				
Ripple rejection	f = 120 Hz	I <sub>O</sub> = 300 mA	62	80		dB	
	I <sub>O</sub> = 5 mA to 500 mA			20	100		
Output voltage regulation	$I_0 = 5 \text{ mA to } 200 \text{ mA}$			10	50	mV	
Temperature coefficient of output voltage	I <sub>O</sub> = 5 mA,	$T_J = 0^{\circ}C$ to $125^{\circ}C$		-1		mV/°C	
Output noise voltage	f = 10 Hz to 100 kHz			40	200	μV	
Dropout voltage				2		V	
Bias current				4.5	6	mA	
D'an anna talan an	$I_{O} = 200 \text{ mA}, V_{I} = 8 \text{ V to } 25 \text{ V}, T_{J} = 0^{\circ}\text{C to } 125^{\circ}\text{C}$				0.8		
Bias current change	$I_{O} = 5 \text{ mA to } 350 \text{ mA},$	$T_J = 0^{\circ}C$ to $125^{\circ}C$			0.5 mA		
Short-circuit output current	V <sub>1</sub> = 35 V			300		mA	
Peak output current				0.7		А	

(1) All characteristics are measured with a  $0.33 \cdot \mu$ F capacitor across the input and a  $0.1 \cdot \mu$ F capacitor across the output. Pulse-testing techniques maintain T<sub>J</sub> as close to T<sub>A</sub> as possible. Thermal effects must be taken into account separately.

(2) This specification applies only for dc power dissipation permitted by Absolute Maximum Ratings.

#### 7.8 Electrical Characteristics — uA78M05I

at specified virtual junction temperature,  $V_1 = 10 \text{ V}$ ,  $I_0 = 350 \text{ mA}$ ,  $T_1 = 25^{\circ}\text{C}$  (unless otherwise noted)

PARAMETER	TEST	ONDITIONS <sup>(1)</sup>	u/	478M0	UNIT	
PARAMETER	IESIC	UNDITIONS ?	MIN	TYP	MAX	UNIT
Output voltage <sup>(2)</sup>	I <sub>O</sub> = 5 mA to 350 mA,		4.8	5	5.2	v
	$V_{I} = 7 V$ to 20 V	$T_J = -40^{\circ}C$ to $125^{\circ}C$	4.75		5.25	v
	1 200	$V_1 = 7 V$ to 25 V		3	100	mV
Input voltage regulation	I <sub>O</sub> = 200 mA	$V_1 = 8 V$ to 25 V		1	50	mv
Dinale rejection	$V_{I} = 8 V \text{ to } 18 V,$	$I_0 = 100 \text{ mA}, T_J = -40^{\circ}\text{C} \text{ to } 125^{\circ}\text{C}$	62			dB
Ripple rejection	f = 120 Hz	I <sub>O</sub> = 300 mA	62	80		uБ
Output voltage	$I_{O} = 5 \text{ mA to } 500 \text{ mA}$			20	100	
regulation	I <sub>O</sub> = 5 mA to 200 mA			10	50	mV
Temperature coefficient of output voltage	I <sub>O</sub> = 5 mA,	$T_J = -40^{\circ}C$ to $125^{\circ}C$		-1		mV/°C
Output noise voltage	f = 10 Hz to 100 kHz			40	200	μV
Dropout voltage				2		V
Bias current				4.5	6	mA
Dies summert skanne	$I_{O} = 200 \text{ mA}, \qquad V_{I} = 8 \text{ V to } 25 \text{ V},$	$T_J = -40^{\circ}C$ to $125^{\circ}C$			0.8	4
Bias current change	I <sub>O</sub> = 5 mA to 350 mA,	$T_J = -40^{\circ}C$ to $125^{\circ}C$			0.5	mA
Short-circuit output current	V <sub>I</sub> = 35 V			300		mA
Peak output current				0.7		А

(1) All characteristics are measured with a  $0.33-\mu$ F capacitor across the input and a  $0.1-\mu$ F capacitor across the output. Pulse-testing techniques maintain T<sub>J</sub> as close to T<sub>A</sub> as possible. Thermal effects must be taken into account separately.

(2) This specification applies only for dc power dissipation permitted by Absolute Maximum Ratings.

6



#### 7.9 Electrical Characteristics — uA78M06C

at specified virtual junction temperature, V<sub>I</sub> = 11 V, I<sub>O</sub> = 350 mA, T<sub>J</sub> = 25°C (unless otherwise noted)

DADAMETED		uA	78M06	6C	UNIT		
PARAMETER		TEST CONDITIONS	(.)	MIN	TYP	MAX	UNIT
Output voltage <sup>(2)</sup>	$I_{0} = 5 \text{ mA to } 350 \text{ mA},$	V <sub>I</sub> = 8 V to 21 V		5.75	6	6.25	v
	$1_0 = 5 \text{ mA to } 550 \text{ mA},$	$v_1 = 0 v (0 21 v)$	$T_J = 0^{\circ}C$ to $125^{\circ}C$	5.7		6.3	v
Input voltage regulation	I <sub>O</sub> = 200 mA	$V_I = 8 V$ to 25 V			5	100	mV
Input voltage regulation	$I_0 = 200 \text{ IIIA}$	$V_I = 9 V$ to 25 V			1.5	50	mv
Ripple rejection	$V_{I} = 8 V \text{ to } 18 V,$	f = 120 Hz	$I_O = 100 \text{ mA},$ $T_J = 0^{\circ}C \text{ to } 125^{\circ}C$	59			dB
			I <sub>O</sub> = 300 mA	59	80		
	$I_0 = 5 \text{ mA to } 500 \text{ mA}$				20	120	mV
Output voltage regulation	$I_{O} = 5 \text{ mA to } 200 \text{ mA}$				10	60	mv
Temperature coefficient of output voltage	I <sub>O</sub> = 5 mA,	$T_J = 0^{\circ}C$ to $125^{\circ}C$			-1		mV/°C
Output noise voltage	f = 10 Hz to 100 kHz				45		μV
Dropout voltage					2		V
Bias current					4.5	6	mA
Diag ourrest change	$V_{I} = 9 V \text{ to } 25 V,$	I <sub>O</sub> = 200 mA,	$T_J = 0^{\circ}C$ to $125^{\circ}C$			0.8	mA
Bias current change	$I_0 = 5 \text{ mA to } 350 \text{ mA},$	$T_J = 0^{\circ}C$ to $125^{\circ}C$				0.5	mA
Short-circuit output current	V <sub>I</sub> = 35 V				270		mA
Peak output current					0.7		Α

(1) All characteristics are measured with a  $0.33 - \mu$ F capacitor across the input and a  $0.1 - \mu$ F capacitor across the output. Pulse-testing techniques maintain T<sub>J</sub> as close to T<sub>A</sub> as possible. Thermal effects must be taken into account separately.

(2) This specification applies only for dc power dissipation permitted by Absolute Maximum Ratings.

### 7.10 Electrical Characteristics — uA78M08C

at specified virtual junction temperature,  $V_1 = 14$  V,  $I_0 = 350$  mA,  $T_J = 25^{\circ}C$  (unless otherwise noted)

DADAMETED		TEST CONDITIONS <sup>(1)</sup>		uA	78M08	SC	UNIT
PARAMETER		TEST CONDITIONS (7		MIN	TYP	MAX	UNIT
Output voltage <sup>(2)</sup>	$V_{-} = 10 E V_{+} = 22 V_{-}$	- 5 mÅ to 250 mÅ		7.7	8	8.3	V
	V <sub>I</sub> = 10.5 V to 23 V,	$I_0 = 5 \text{ mA to } 350 \text{ mA}$	$T_J = 0^{\circ}C$ to $125^{\circ}C$	7.6		8.4	v
Input voltage regulation	L = 200  mA	$V_{I} = 10.5 \text{ V}$ to 25 V			6	100	mV
Input voltage regulation	I <sub>O</sub> = 200 mA	$V_I = 11 \text{ V}$ to 25 V			2	50	IIIV
Bipple rejection	$V_{I} = 11 \text{ V to } 21.5 \text{ V},$	I <sub>O</sub> = 100 mA,	$T_J = 0^{\circ}C$ to $125^{\circ}C$	56			dB
Ripple rejection	f = 120 Hz	I <sub>O</sub> = 300 mA		56	80		uБ
Output voltage regulation	$I_{O} = 5 \text{ mA to } 500 \text{ mA}$				25	160	mV
Output voltage regulation	$I_{O} = 5 \text{ mA to } 200 \text{ mA}$				10	80	IIIV
Temperature coefficient of output voltage	I <sub>O</sub> = 5 mA,	$T_J = 0^{\circ}C$ to $125^{\circ}C$			-1		mV/°C
Output noise voltage	f = 10 Hz to 100 kHz				52		μV
Dropout voltage					2		V
Bias current					4.6	6	mA
Diag ourrent change	$V_{I} = 10.5 V \text{ to } 25 V,$	I <sub>O</sub> = 200 mA,	$T_J = 0^{\circ}C$ to $125^{\circ}C$			0.8	~
Bias current change	$I_{O} = 5 \text{ mA to } 350 \text{ mA},$	$T_J = 0^{\circ}C$ to $125^{\circ}C$				0.5	mA
Short-circuit output current	V <sub>I</sub> = 35 V				250		mA
Peak output current					0.7		А

(1) All characteristics are measured with a  $0.33 \cdot \mu$ F capacitor across the input and a  $0.1 \cdot \mu$ F capacitor across the output. Pulse-testing techniques maintain T<sub>J</sub> as close to T<sub>A</sub> as possible. Thermal effects must be taken into account separately.

(2) This specification applies only for dc power dissipation permitted by *Absolute Maximum Ratings*.

### 7.11 Electrical Characteristics — uA78M09C

at specified virtual junction temperature,  $V_1 = 16$  V,  $I_0 = 350$  mA,  $T_J = 25^{\circ}C$  (unless otherwise noted)

DADAMETED		TEST CONDITIONS <sup>(1)</sup>		uA	78M09	OC	UNIT
PARAMETER		TEST CONDITIONS		MIN	TYP	MAX	UNIT
Output voltage <sup>(2)</sup>	V <sub>1</sub> = 11.5 V to 24 V,	I <sub>O</sub> = 5 mA to 350 mA		8.6	9	9.4	V
Output voltage	$v_1 = 11.5 \ v \ 10 \ 24 \ v_1$	$I_0 = 5 \text{ mA to } 550 \text{ mA}$	$T_J = 0^{\circ}C$ to $125^{\circ}C$	8.5		9.5	v
Input voltage regulation	L 200 mA	V <sub>I</sub> = 11.5 V to 26 V			6	100	mV
Input voltage regulation	I <sub>O</sub> = 200 mA	$V_{I} = 12 \text{ V} \text{ to } 26 \text{ V}$			2	50	mv
Dinale rejection	$V_{I} = 13 \text{ V to } 23 \text{ V},$	I <sub>O</sub> = 100 mA,	$T_J = 0^{\circ}C$ to $125^{\circ}C$	56			dB
Ripple rejection	f = 120 Hz	I <sub>O</sub> = 300 mA		56	80		uв
	$I_{O} = 5 \text{ mA to } 500 \text{ mA}$				25	180	mV
Output voltage regulation	$I_0 = 5 \text{ mA to } 200 \text{ mA}$				10	90	mv
Temperature coefficient of output voltage	I <sub>O</sub> = 5 mA,	$T_J = 0^{\circ}C$ to $125^{\circ}C$			-1		mV/°C
Output noise voltage	f = 10 Hz to 100 kHz				58		μV
Dropout voltage					2		V
Bias current					4.6	6	mA
Dies summent shares	V <sub>I</sub> = 11.5 V to 26 V,	I <sub>O</sub> = 200 mA,	$T_J = 0^{\circ}C$ to $125^{\circ}C$			0.8	
Bias current change	$I_0 = 5 \text{ mA to } 350 \text{ mA},$	$T_J = 0^{\circ}C$ to $125^{\circ}C$				0.5	mA
Short-circuit output current	V <sub>I</sub> = 35 V				250		mA
Peak output current					0.7		А

(1) All characteristics are measured with a  $0.33 - \mu$ F capacitor across the input and a  $0.1 - \mu$ F capacitor across the output. Pulse-testing techniques maintain T<sub>J</sub> as close to T<sub>A</sub> as possible. Thermal effects must be taken into account separately.

(2) This specification applies only for dc power dissipation permitted by Absolute Maximum Ratings.

### 7.12 Electrical Characteristics — uA78M10C

at specified virtual junction temperature,  $V_1 = 17$  V,  $I_0 = 350$  mA,  $T_J = 25^{\circ}C$  (unless otherwise noted)

DADAMETER				uA	78M10	C	UNIT
PARAMETER		TEST CONDITIONS <sup>(1)</sup>		MIN	TYP	MAX	UNIT
Output voltage <sup>(2)</sup>				9.6	10	10.4	V
	$V_{I} = 12.5 V \text{ to } 25 V,$	$I_0 = 5 \text{ mA to } 350 \text{ mA}$	$T_J = 0^{\circ}C$ to $125^{\circ}C$	9.5		10.5	v
Input voltage regulation	$L = 200 m \Lambda$	$V_{I} = 12.5 V \text{ to } 28 V$			7	100	m\/
Input voltage regulation	I <sub>O</sub> = 200 mA	$V_I = 14 \text{ V} \text{ to } 28 \text{ V}$			2	50	mV
Bipple rejection	$V_{I} = 15 V \text{ to } 25 V,$	I <sub>O</sub> = 100 mA,	$T_J = 0^{\circ}C$ to $125^{\circ}C$	59			dB
Ripple rejection	f = 120 Hz	I <sub>O</sub> = 300 mA		55	80		uБ
Output voltage regulation	$I_{O} = 5 \text{ mA to } 500 \text{ mA}$				25	200	mV
Output voltage regulation	$I_{O}$ = 5 mA to 200 mA				10	100	mv
Temperature coefficient of output voltage	I <sub>O</sub> = 5 mA,	$T_J = 0^{\circ}C$ to $125^{\circ}C$			-1		mV/°C
Output noise voltage	f = 10 Hz to 100 kHz				64		μV
Dropout voltage					2		V
Bias current					4.7	6	mA
Diag ourrent change	$V_{I} = 12.5 V \text{ to } 28 V,$	I <sub>O</sub> = 200 mA,	$T_J = 0^{\circ}C$ to $125^{\circ}C$			0.8	~^^
Bias current change	$I_{O} = 5 \text{ mA to } 350 \text{ mA},$	$T_J = 0^{\circ}C$ to $125^{\circ}C$				0.5	mA
Short-circuit output current	V <sub>I</sub> = 35 V				245		mA
Peak output current					0.7		А

(1) All characteristics are measured with a  $0.33 - \mu$ F capacitor across the input and a  $0.1 - \mu$ F capacitor across the output. Pulse-testing techniques maintain T<sub>J</sub> as close to T<sub>A</sub> as possible. Thermal effects must be taken into account separately.

(2) This specification applies only for dc power dissipation permitted by *Absolute Maximum Ratings*.

Submit Documentation Feedback

8



### 7.13 Electrical Characteristics — uA78M12C


at specified virtual junction temperature, V<sub>I</sub> = 19 V, I<sub>O</sub> = 350 mA, T<sub>J</sub> = 25°C (unless otherwise noted)

DADAMETED		TEST CONDITIONS <sup>(1)</sup>		uA	78M12	2C	UNIT
PARAMETER		TEST CONDITIONS (7		MIN	TYP	MAX	UNIT
Output voltage <sup>(2)</sup>	V <sub>1</sub> = 14.5 V to 27 V,	$I_{0} = 5 \text{ mA to } 350 \text{ mA}$		11.5	12	12.5	V
	$v_{\rm I} = 14.5 \ v \ 10 \ 27 \ v,$	$I_0 = 5 \text{ mA to } 550 \text{ mA}$	$T_J = 0^{\circ}C$ to $125^{\circ}C$	11.4		12.6	v
Input voltage regulation	L = 200  mA	$V_{I} = 14.5 \text{ V to } 30 \text{ V}$			8	100	mV
Input voltage regulation	I <sub>O</sub> = 200 mA	$V_{I} = 16 V \text{ to } 30 V$			2	50	IIIV
Dipple rejection	$V_{I} = 15 V \text{ to } 25 V,$	I <sub>O</sub> = 100 mA,	$T_J = 0^{\circ}C$ to $125^{\circ}C$	55			dB
Ripple rejection	f = 120 Hz	I <sub>O</sub> = 300 mA		55	80		uБ
	$I_{O}$ = 5 mA to 500 mA				25	240	mV
Output voltage regulation	$I_0 = 5 \text{ mA to } 200 \text{ mA}$				10	120	mv
Temperature coefficient of output voltage	I <sub>O</sub> = 5 mA,	$T_J = 0^{\circ}C$ to $125^{\circ}C$			-1		mV/°C
Output noise voltage	f = 10 Hz to 100 kHz				75		μV
Dropout voltage					2		V
Bias current					4.8	6	mA
Diag ourrent change	V <sub>I</sub> = 14.5 V to 30 V,	I <sub>O</sub> = 200 mA,	$T_J = 0^{\circ}C$ to $125^{\circ}C$			0.8	mA
Bias current change	$I_{O} = 5 \text{ mA to } 350 \text{ mA},$	$T_J = 0^{\circ}C$ to $125^{\circ}C$				0.5	mA
Short-circuit output current	V <sub>I</sub> = 35 V				240		mA
Peak output current					0.7		А

(1) All characteristics are measured with a 0.33- $\mu$ F capacitor across the input and a 0.1- $\mu$ F capacitor across the output. Pulse-testing techniques maintain T<sub>J</sub> as close to T<sub>A</sub> as possible. Thermal effects must be taken into account separately.

(2) This specification applies only for dc power dissipation permitted by Absolute Maximum Ratings.

#### 7.14 Typical Characteristics



Product Folder Links: uA78M05 uA78M06 uA78M08 uA78M09 uA78M10 uA78M12 uA78M33


#### TEXAS INSTRUMENTS

# 8 Detailed Description

# 8.1 Overview

This series of fixed-voltage integrated-circuit voltage regulators is designed for a wide range of applications. The applications include on-card regulation for elimination of noise and distribution problems associated with single-point regulation. Each of these regulators can deliver up to 500 mA of output current. The internal current-limiting and thermal-shutdown features of these regulators essentially make them immune to overload. In addition to use as fixed-voltage regulators, these devices can be used with external components to obtain adjustable output voltages and currents and also as the power-pass element in precision regulators.

### 8.2 Functional Block Diagram

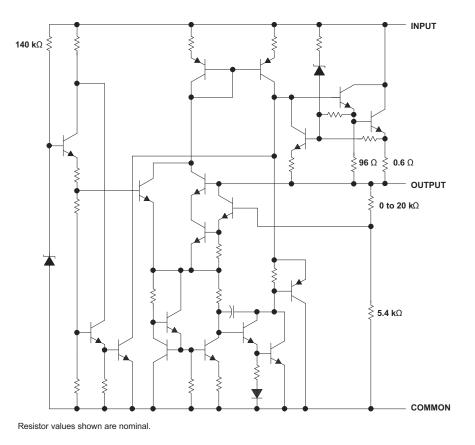

### 8.3 Feature Description

- 3-Terminal Regulators
- Output Current up to 500 mA
- No External Components
- Internal Thermal-Overload Protection
- High Power-Dissipation Capability
- Internal Short-Circuit Current Limiting
- Output Transistor Safe-Area Compensation

### 8.4 Device Functional Modes

#### 8.4.1 Fixed-Output Mode

These devices are available in fixed-output voltages. See the orderable part list for the desired output.

Product Folder Links: uA78M05 uA78M06 uA78M08 uA78M09 uA78M10 uA78M12 uA78M33



### 9 Application and Implementation

#### NOTE

Information in the following applications sections is not part of the TI component specification, and TI does not warrant its accuracy or completeness. TI's customers are responsible for determining suitability of components for their purposes. Customers should validate and test their design implementation to confirm system functionality.

#### 9.1 Application Information

The UA78Mxx devices are ideal for use as linear regulators with few external components needed for a working design. They are also useful for attenuating power supply noise.

#### 9.2 Typical Application

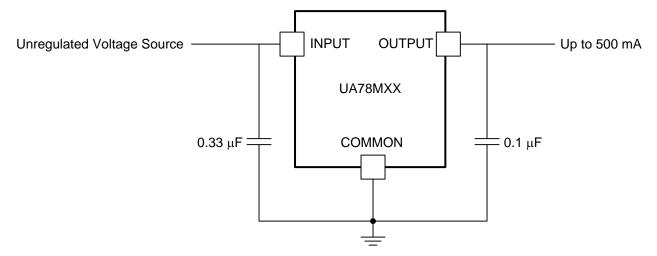


Figure 2. Fixed-Output Regulator

#### 9.2.1 Design Requirements


An  $0.33-\mu$ F decoupling capacitor on the input and a  $0.1-\mu$ F decoupling capacitor on the output are recommended for the UA78Mxx to behave as close to datasheet specifications as possible.

#### 9.2.2 Detailed Design Procedure

The customer's end application will determine how the schematic for UA78Mxx is designed. For example, if there is a load connected to a negative voltage as its ground, a clamp diode may be necessary on the output. In the event of an input short circuit or another case where the output voltage can be higher than the input, a diode shunt can be connected across the device with the anode at the output and cathode at the input

### **Typical Application (continued)**

#### 9.2.3 Application Curves





#### **10 Power Supply Recommendations**

See *Recommended Operating Conditions* for the recommended power supply voltages for each variation of the UA78Mxx. Different orderable part numbers will be able to tolerate different levels of voltage. It is also recommended to have a decoupling capacitor on the output to limit noise on the input.

### 11 Layout

#### 11.1 Layout Guidelines

Keep trace widths large enough to eliminate problematic IxR voltage drops at the input and output terminals. Input decoupling capacitors should be placed as close to the UA78MXX as possible.

### 11.2 Layout Example




Figure 4. Layout Diagram

### **12 Device and Documentation Support**

#### 12.1 Related Links

The table below lists quick access links. Categories include technical documents, support and community resources, tools and software, and quick access to sample or buy.

PARTS	PRODUCT FOLDER	SAMPLE & BUY	TECHNICAL DOCUMENTS	TOOLS & SOFTWARE	SUPPORT & COMMUNITY
uA78M05	Click here	Click here	Click here	Click here	Click here
uA78M06	Click here	Click here	Click here	Click here	Click here
uA78M08	Click here	Click here	Click here	Click here	Click here
uA78M09	Click here	Click here	Click here	Click here	Click here
uA78M10	Click here	Click here	Click here	Click here	Click here
uA78M12	Click here	Click here	Click here	Click here	Click here
uA78M33	Click here	Click here	Click here	Click here	Click here

#### Table 1. Related Links

#### 12.2 Trademarks

All trademarks are the property of their respective owners.

#### 12.3 Electrostatic Discharge Caution



These devices have limited built-in ESD protection. The leads should be shorted together or the device placed in conductive foam during storage or handling to prevent electrostatic damage to the MOS gates.

#### 12.4 Glossary

SLYZ022 — TI Glossary.

This glossary lists and explains terms, acronyms, and definitions.

#### 13 Mechanical, Packaging, and Orderable Information

The following pages include mechanical, packaging, and orderable information. This information is the most current data available for the designated devices. This data is subject to change without notice and revision of this document. For browser-based versions of this data sheet, refer to the left-hand navigation.



25-Dec-2014

# **PACKAGING INFORMATION**

Orderable Device		Package Type	Package Drawing	Pins	Package Qty	Eco Plan	Lead/Ball Finish	MSL Peak Temp	Op Temp (°C)	Device Marking	Samples
UA78M05CDCY	(1) ACTIVE	SOT-223	DCY	4	80	(2) Green (RoHS & no Sb/Br)	(6) CU SN	(3) Level-2-260C-1 YEAR	0 to 125	(4/5) C5	Samples
UA78M05CDCYG3	ACTIVE	SOT-223	DCY	4	80	Green (RoHS & no Sb/Br)	CU SN	Level-2-260C-1 YEAR	0 to 125	C5	Samples
UA78M05CDCYR	ACTIVE	SOT-223	DCY	4	2500	Green (RoHS & no Sb/Br)	CU SN	Level-2-260C-1 YEAR	0 to 125	C5	Samples
UA78M05CDCYRG3	ACTIVE	SOT-223	DCY	4	2500	Green (RoHS & no Sb/Br)	CU SN	Level-2-260C-1 YEAR	0 to 125	C5	Samples
UA78M05CKC	OBSOLETE	TO-220	KC	3		TBD	Call TI	Call TI	0 to 125	UA78M05C	
UA78M05CKCS	ACTIVE	TO-220	KCS	3	50	Pb-Free (RoHS)	CU SN	N / A for Pkg Type	0 to 125	UA78M05C	Samples
UA78M05CKCSE3	ACTIVE	TO-220	KCS	3	50	Pb-Free (RoHS)	CU SN	N / A for Pkg Type	0 to 125	UA78M05C	Samples
UA78M05CKTPR	OBSOLETE	PFM	KTP	2		TBD	Call TI	Call TI	0 to 125	UA78M05C	
UA78M05CKTPRG3	OBSOLETE	PFM	KTP	2		TBD	Call TI	Call TI	0 to 125	UA78M05C	
UA78M05CKVURG3	ACTIVE	TO-252	KVU	3	2500	Green (RoHS & no Sb/Br)	CU SN	Level-3-260C-168 HR	0 to 125	78M05C	Samples
UA78M05IDCY	ACTIVE	SOT-223	DCY	4	80	Green (RoHS & no Sb/Br)	CU SN	Level-2-260C-1 YEAR	-40 to 125	J5	Samples
UA78M05IDCYG3	ACTIVE	SOT-223	DCY	4	80	Green (RoHS & no Sb/Br)	CU SN	Level-2-260C-1 YEAR	-40 to 125	J5	Samples
UA78M05IDCYR	ACTIVE	SOT-223	DCY	4	2500	Green (RoHS & no Sb/Br)	CU SN	Level-2-260C-1 YEAR	-40 to 125	J5	Samples
UA78M05IDCYRG3	ACTIVE	SOT-223	DCY	4	2500	Green (RoHS & no Sb/Br)	CU SN	Level-2-260C-1 YEAR	-40 to 125	J5	Samples
UA78M05IKC	OBSOLETE	TO-220	KC	3		TBD	Call TI	Call TI	-40 to 125	UA78M05I	
UA78M05IKCE3	OBSOLETE	TO-220	KC	3		TBD	Call TI	Call TI	-40 to 125	UA78M05I	
UA78M05IKCS	ACTIVE	TO-220	KCS	3	50	Pb-Free (RoHS)	CU SN	N / A for Pkg Type	-40 to 125	UA78M05I	Samples
UA78M05IKCSE3	ACTIVE	TO-220	KCS	3	50	Pb-Free (RoHS)	CU SN	N / A for Pkg Type	-40 to 125	UA78M05I	Samples
UA78M05IKTPR	OBSOLETE	PFM	KTP	2		TBD	Call TI	Call TI	-40 to 125	UA78M05I	
UA78M05IKTPRG3	OBSOLETE	PFM	KTP	2		TBD	Call TI	Call TI	-40 to 125	UA78M05I	



# PACKAGE OPTION ADDENDUM

25-Dec-2014

Orderable Device	Status	Package Type	0	Pins		Eco Plan	Lead/Ball Finish	MSL Peak Temp	Op Temp (°C)	Device Marking	Sample
	(1)		Drawing		Qty	(2)	(6)	(3)		(4/5)	
UA78M05IKVURG3	ACTIVE	TO-252	KVU	3	2500	Green (RoHS & no Sb/Br)	CU SN	Level-3-260C-168 HR	-40 to 125	78M05I	Sample
UA78M06CKC	OBSOLETE	TO-220	KC	3		TBD	Call TI	Call TI	0 to 125		
UA78M06CKTPR	OBSOLETE	PFM	KTP	2		TBD	Call TI	Call TI	0 to 125	UA78M06C	
UA78M06CKTPRG3	OBSOLETE	PFM	KTP	2		TBD	Call TI	Call TI	0 to 125	UA78M06C	
UA78M06CKVURG3	ACTIVE	TO-252	KVU	3	2500	Green (RoHS & no Sb/Br)	CU SN	Level-3-260C-168 HR	0 to 125	78M06C	Sampl
UA78M08CDCY	ACTIVE	SOT-223	DCY	4	80	Green (RoHS & no Sb/Br)	CU SN	Level-2-260C-1 YEAR	0 to 125	C8	Sampl
UA78M08CDCYG3	ACTIVE	SOT-223	DCY	4	80	Green (RoHS & no Sb/Br)	CU SN	Level-2-260C-1 YEAR	0 to 125	C8	Sampl
UA78M08CDCYR	ACTIVE	SOT-223	DCY	4	2500	Green (RoHS & no Sb/Br)	CU SN	Level-2-260C-1 YEAR	0 to 125	C8	Sampl
UA78M08CKC	OBSOLETE	TO-220	KC	3		TBD	Call TI	Call TI	0 to 125	UA78M08C	
UA78M08CKCE3	OBSOLETE	TO-220	KC	3		TBD	Call TI	Call TI	0 to 125	UA78M08C	
UA78M08CKCS	ACTIVE	TO-220	KCS	3	50	Pb-Free (RoHS)	CU SN	N / A for Pkg Type	0 to 125	UA78M08C	Samp
UA78M08CKCSE3	ACTIVE	TO-220	KCS	3	50	Pb-Free (RoHS)	CU SN	N / A for Pkg Type	0 to 125	UA78M08C	Samp
UA78M08CKTPR	OBSOLETE	PFM	KTP	2		TBD	Call TI	Call TI	0 to 125	UA78M08C	
UA78M08CKTPRG3	OBSOLETE	PFM	KTP	2		TBD	Call TI	Call TI	0 to 125	UA78M08C	
UA78M08CKVURG3	ACTIVE	TO-252	KVU	3	2500	Green (RoHS & no Sb/Br)	CU SN	Level-3-260C-168 HR	0 to 125	78M08C	Samp
UA78M09CKC	OBSOLETE	TO-220	KC	3		TBD	Call TI	Call TI	0 to 125		
UA78M09CKTP	OBSOLETE	PFM	KTP	2		TBD	Call TI	Call TI	0 to 125		
UA78M09CKTPR	OBSOLETE	PFM	KTP	2		TBD	Call TI	Call TI	0 to 125	UA78M09C	
UA78M09CKTPRG3	OBSOLETE	PFM	KTP	2		TBD	Call TI	Call TI	0 to 125	UA78M09C	
UA78M09CKVURG3	ACTIVE	TO-252	KVU	3	2500	Green (RoHS & no Sb/Br)	CU SN	Level-3-260C-168 HR	0 to 125	78M09C	Samp
UA78M10CKC	OBSOLETE	TO-220	KC	3		TBD	Call TI	Call TI	0 to 125		
UA78M10CKTPR	OBSOLETE	PFM	KTP	2		TBD	Call TI	Call TI	0 to 125	UA78M10C	
UA78M10CKTPRG3	OBSOLETE	PFM	KTP	2		TBD	Call TI	Call TI	0 to 125	UA78M10C	
UA78M10CKVURG3	ACTIVE	TO-252	KVU	3	2500	Green (RoHS & no Sb/Br)	CU SN	Level-3-260C-168 HR	0 to 125	78M10C	Samp



# PACKAGE OPTION ADDENDUM

25-Dec-2014

Orderable Device	Status	Package Type	Package	Pins	Package	Eco Plan	Lead/Ball Finish	MSL Peak Temp	Op Temp (°C)	Device Marking	Samples
	(1)		Drawing		Qty	(2)	(6)	(3)		(4/5)	
UA78M12CKC	OBSOLETE	TO-220	KC	3		TBD	Call TI	Call TI	0 to 125	UA78M12C	
UA78M12CKCS	ACTIVE	TO-220	KCS	3	50	Pb-Free (RoHS)	CU SN	N / A for Pkg Type	0 to 125	UA78M12C	Samples
UA78M12CKCSE3	ACTIVE	TO-220	KCS	3	50	Pb-Free (RoHS)	CU SN	N / A for Pkg Type	0 to 125	UA78M12C	Samples
UA78M12CKTPR	OBSOLETE	PFM	KTP	2		TBD	Call TI	Call TI	0 to 125	UA78M12C	
UA78M12CKTPRG3	OBSOLETE	PFM	KTP	2		TBD	Call TI	Call TI	0 to 125	UA78M12C	
UA78M12CKVURG3	ACTIVE	TO-252	KVU	3	2500	Green (RoHS & no Sb/Br)	CU SN	Level-3-260C-168 HR	0 to 125	78M12C	Samples
UA78M33CDCY	ACTIVE	SOT-223	DCY	4	80	Green (RoHS & no Sb/Br)	CU SN	Level-2-260C-1 YEAR	0 to 125	C3	Samples
UA78M33CDCYG3	ACTIVE	SOT-223	DCY	4	80	Green (RoHS & no Sb/Br)	CU SN	Level-2-260C-1 YEAR	0 to 125	C3	Samples
UA78M33CDCYR	ACTIVE	SOT-223	DCY	4	2500	Green (RoHS & no Sb/Br)	CU SN	Level-2-260C-1 YEAR	0 to 125	С3	Samples
UA78M33CDCYRG3	ACTIVE	SOT-223	DCY	4	2500	Green (RoHS & no Sb/Br)	CU SN	Level-2-260C-1 YEAR	0 to 125	C3	Samples
UA78M33CKC	OBSOLETE	TO-220	KC	3		TBD	Call TI	Call TI	0 to 125	UA78M33C	
UA78M33CKCE3	OBSOLETE	TO-220	KC	3		TBD	Call TI	Call TI	0 to 125	UA78M33C	
UA78M33CKCS	ACTIVE	TO-220	KCS	3	50	Pb-Free (RoHS)	CU SN	N / A for Pkg Type	0 to 125	UA78M33C	Samples
UA78M33CKCSE3	ACTIVE	TO-220	KCS	3	50	Pb-Free (RoHS)	CU SN	N / A for Pkg Type	0 to 125	UA78M33C	Samples
UA78M33CKTPR	OBSOLETE	PFM	KTP	2		TBD	Call TI	Call TI	0 to 125	UA78M33C	
UA78M33CKTPRG3	OBSOLETE	PFM	KTP	2		TBD	Call TI	Call TI	0 to 125	UA78M33C	
UA78M33CKVURG3	ACTIVE	TO-252	KVU	3	2500	Green (RoHS & no Sb/Br)	CU SN	Level-3-260C-168 HR	0 to 125	78M33C	Samples
UA78M33IKVURG3	ACTIVE	TO-252	KVU	3	2500	Green (RoHS & no Sb/Br)	CU SN	Level-3-260C-168 HR	-40 to 125	78M33I	Samples

<sup>(1)</sup> The marketing status values are defined as follows: **ACTIVE:** Product device recommended for new designs.

LIFEBUY: TI has announced that the device will be discontinued, and a lifetime-buy period is in effect.

NRND: Not recommended for new designs. Device is in production to support existing customers, but TI does not recommend using this part in a new design.

PREVIEW: Device has been announced but is not in production. Samples may or may not be available.

**OBSOLETE:** TI has discontinued the production of the device.



25-Dec-2014

(2) Eco Plan - The planned eco-friendly classification: Pb-Free (RoHS), Pb-Free (RoHS Exempt), or Green (RoHS & no Sb/Br) - please check http://www.ti.com/productcontent for the latest availability information and additional product content details.

**TBD:** The Pb-Free/Green conversion plan has not been defined.

**Pb-Free (RoHS):** TI's terms "Lead-Free" or "Pb-Free" mean semiconductor products that are compatible with the current RoHS requirements for all 6 substances, including the requirement that lead not exceed 0.1% by weight in homogeneous materials. Where designed to be soldered at high temperatures, TI Pb-Free products are suitable for use in specified lead-free processes. **Pb-Free (RoHS Exempt):** This component has a RoHS exemption for either 1) lead-based flip-chip solder bumps used between the die and package, or 2) lead-based die adhesive used between the die and leadframe. The component is otherwise considered Pb-Free (RoHS compatible) as defined above.

Green (RoHS & no Sb/Br): TI defines "Green" to mean Pb-Free (RoHS compatible), and free of Bromine (Br) and Antimony (Sb) based flame retardants (Br or Sb do not exceed 0.1% by weight in homogeneous material)

<sup>(3)</sup> MSL, Peak Temp. - The Moisture Sensitivity Level rating according to the JEDEC industry standard classifications, and peak solder temperature.

<sup>(4)</sup> There may be additional marking, which relates to the logo, the lot trace code information, or the environmental category on the device.

(<sup>5)</sup> Multiple Device Markings will be inside parentheses. Only one Device Marking contained in parentheses and separated by a "~" will appear on a device. If a line is indented then it is a continuation of the previous line and the two combined represent the entire Device Marking for that device.

<sup>(6)</sup> Lead/Ball Finish - Orderable Devices may have multiple material finish options. Finish options are separated by a vertical ruled line. Lead/Ball Finish values may wrap to two lines if the finish value exceeds the maximum column width.

**Important Information and Disclaimer:**The information provided on this page represents TI's knowledge and belief as of the date that it is provided. TI bases its knowledge and belief on information provided by third parties, and makes no representation or warranty as to the accuracy of such information. Efforts are underway to better integrate information from third parties. TI has taken and continues to take reasonable steps to provide representative and accurate information but may not have conducted destructive testing or chemical analysis on incoming materials and chemicals. TI and TI suppliers consider certain information to be proprietary, and thus CAS numbers and other limited information may not be available for release.

In no event shall TI's liability arising out of such information exceed the total purchase price of the TI part(s) at issue in this document sold by TI to Customer on an annual basis.

#### OTHER QUALIFIED VERSIONS OF UA78M05, UA78M10, UA78M33 :

• Automotive: UA78M05-Q1, UA78M10-Q1, UA78M33-Q1

NOTE: Qualified Version Definitions:

• Automotive - Q100 devices qualified for high-reliability automotive applications targeting zero defects


# PACKAGE MATERIALS INFORMATION

www.ti.com

Texas Instruments

## TAPE AND REEL INFORMATION



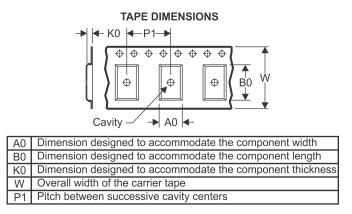

# QUADRANT ASSIGNMENTS FOR PIN 1 ORIENTATION IN TAPE



Device	Package Type	Package Drawing		SPQ	Reel Diameter (mm)	Reel Width W1 (mm)	A0 (mm)	B0 (mm)	K0 (mm)	P1 (mm)	W (mm)	Pin1 Quadrant
UA78M05CKVURG3	TO-252	KVU	3	2500	330.0	16.4	6.9	10.5	2.7	8.0	16.0	Q2
UA78M05IDCYR	SOT-223	DCY	4	2500	330.0	12.4	7.05	7.4	1.9	8.0	12.0	Q3
UA78M05IKVURG3	TO-252	KVU	3	2500	330.0	16.4	6.9	10.5	2.7	8.0	16.0	Q2
UA78M06CKVURG3	TO-252	KVU	3	2500	330.0	16.4	6.9	10.5	2.7	8.0	16.0	Q2
UA78M08CDCYR	SOT-223	DCY	4	2500	330.0	12.4	7.05	7.4	1.9	8.0	12.0	Q3
UA78M08CKVURG3	TO-252	KVU	3	2500	330.0	16.4	6.9	10.5	2.7	8.0	16.0	Q2
UA78M09CKVURG3	TO-252	KVU	3	2500	330.0	16.4	6.9	10.5	2.7	8.0	16.0	Q2
UA78M10CKVURG3	TO-252	KVU	3	2500	330.0	16.4	6.9	10.5	2.7	8.0	16.0	Q2
UA78M12CKVURG3	TO-252	KVU	3	2500	330.0	16.4	6.9	10.5	2.7	8.0	16.0	Q2
UA78M33CDCYR	SOT-223	DCY	4	2500	330.0	12.4	7.05	7.4	1.9	8.0	12.0	Q3
UA78M33CKVURG3	TO-252	KVU	3	2500	330.0	16.4	6.9	10.5	2.7	8.0	16.0	Q2
UA78M33IKVURG3	TO-252	KVU	3	2500	330.0	16.4	6.9	10.5	2.7	8.0	16.0	Q2

TEXAS INSTRUMENTS

www.ti.com

# PACKAGE MATERIALS INFORMATION

25-Dec-2014



*All dimensions are nominal	1						1
Device	Package Type	Package Drawing	Pins	SPQ	Length (mm)	Width (mm)	Height (mm)
UA78M05CKVURG3	TO-252	KVU	3	2500	340.0	340.0	38.0
UA78M05IDCYR	SOT-223	DCY	4	2500	340.0	340.0	38.0
UA78M05IKVURG3	TO-252	KVU	3	2500	340.0	340.0	38.0
UA78M06CKVURG3	TO-252	KVU	3	2500	340.0	340.0	38.0
UA78M08CDCYR	SOT-223	DCY	4	2500	340.0	340.0	38.0
UA78M08CKVURG3	TO-252	KVU	3	2500	340.0	340.0	38.0
UA78M09CKVURG3	TO-252	KVU	3	2500	340.0	340.0	38.0
UA78M10CKVURG3	TO-252	KVU	3	2500	340.0	340.0	38.0
UA78M12CKVURG3	TO-252	KVU	3	2500	340.0	340.0	38.0
UA78M33CDCYR	SOT-223	DCY	4	2500	340.0	340.0	38.0
UA78M33CKVURG3	TO-252	KVU	3	2500	340.0	340.0	38.0
UA78M33IKVURG3	TO-252	KVU	3	2500	340.0	340.0	38.0


# **MECHANICAL DATA**

MPDS094A - APRIL 2001 - REVISED JUNE 2002



- B. This drawing is subject to change without notice.
  - C. Body dimensions do not include mold flash or protrusion.
  - D. Falls within JEDEC TO-261 Variation AA.



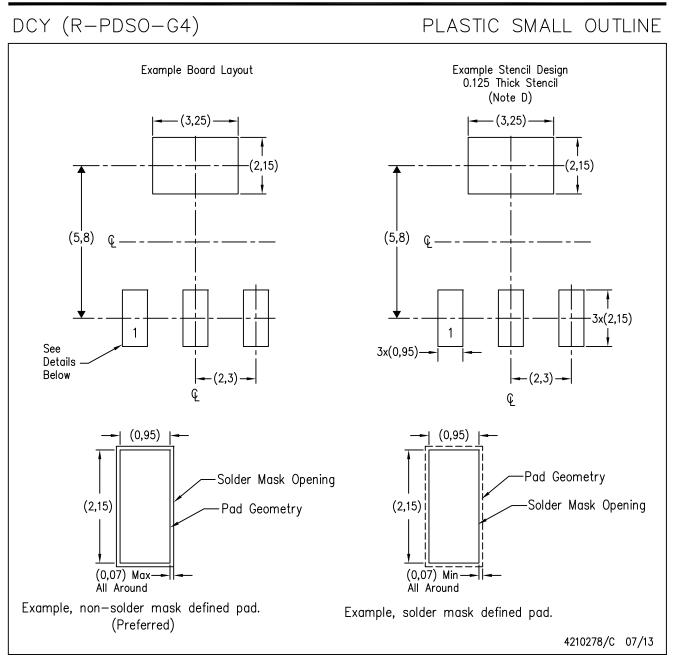

- NOTES: A. All linear dimensions are in millimeters.
  - B. This drawing is subject to change without notice.
  - C. Publication IPC-7351 is recommended for alternate designs.
  - D. Laser cutting apertures with trapezoidal walls and also rounding corners will offer better paste release. Customers should contact their board assembly site for stencil recommendations. Refer to IPC 7525 for stencil design considerations.




# **MECHANICAL DATA**

MPSF001F - JANUARY 1996 - REVISED JANUARY 2002

#### KTP (R-PSFM-G2)

#### PowerFLEX<sup>™</sup> PLASTIC FLANGE-MOUNT PACKAGE

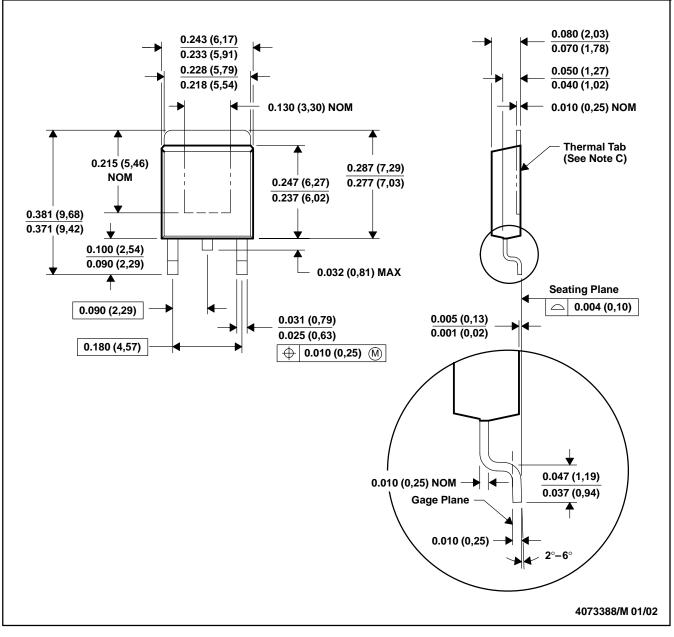


- NOTES: A. All linear dimensions are in inches (millimeters).
  - B. This drawing is subject to change without notice.
  - C. The center lead is in electrical contact with the thermal tab.
  - D. Dimensions do not include mold protrusions, not to exceed 0.006 (0,15).
  - E. Falls within JEDEC TO-252 variation AC.

PowerFLEX is a trademark of Texas Instruments.

KVU (R-PSFM-G3)


# PLASTIC FLANGE-MOUNT PACKAGE

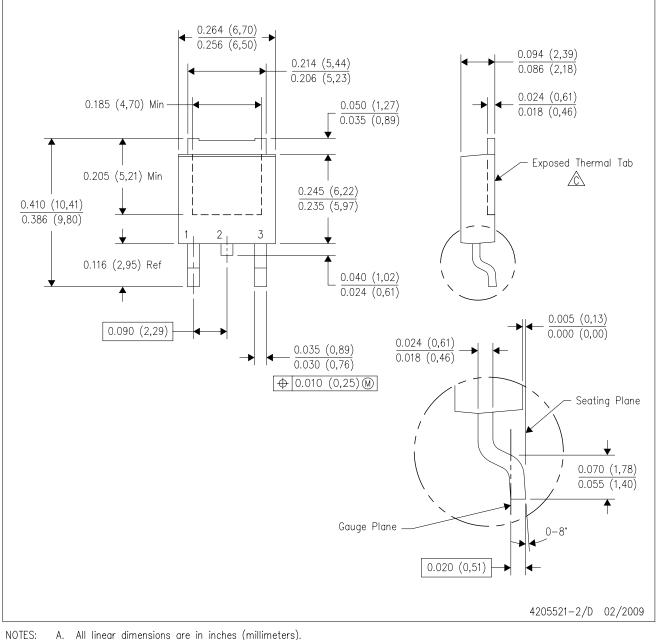

- A. All linear dimensions are in inches (millimeters).
  - B. This drawing is subject to change without notice.
  - $\bigtriangleup$  The center lead is in electrical contact with the exposed thermal tab.
  - D. Body Dimensions do not include mold flash or protrusions. Mold flash and protrusion shall not exceed 0.006 (0,15) per side. E. Falls within JEDEC TO-252 variation AA.



# LAND PATTERN DATA

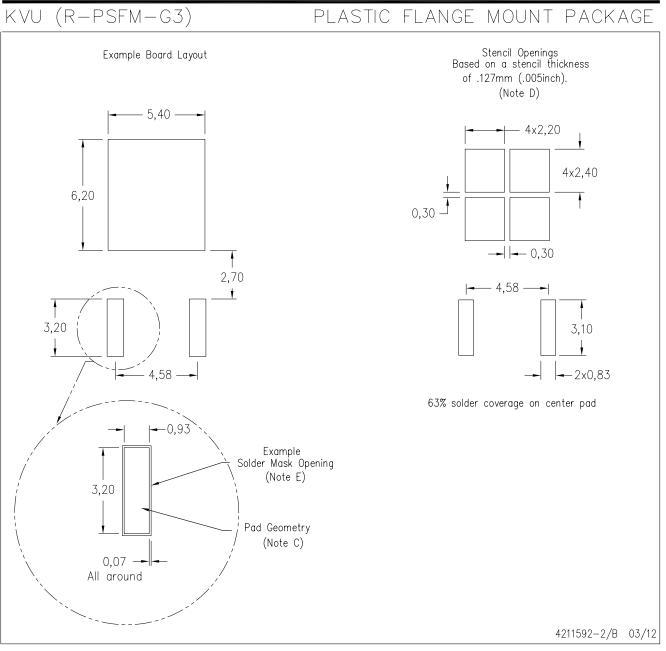

NOTES: A. All linear dimensions are in millimeters.

- B. This drawing is subject to change without notice.
- C. Publication IPC-SM-782 is an alternate information source for PCB land pattern designs.
- D. Laser cutting apertures with trapezoidal walls and also rounding corners will offer better paste release. Customers should contact their board assembly site for stencil design recommendations. Refer to IPC-7525 for other stencil recommendations.
- E. Customers should contact their board fabrication site for recommended solder mask tolerances and via tenting recommendations for vias placed in thermal pad.




# **KCS0003B**



# **PACKAGE OUTLINE**

# TO-220 - 19.65 mm max height

TO-220

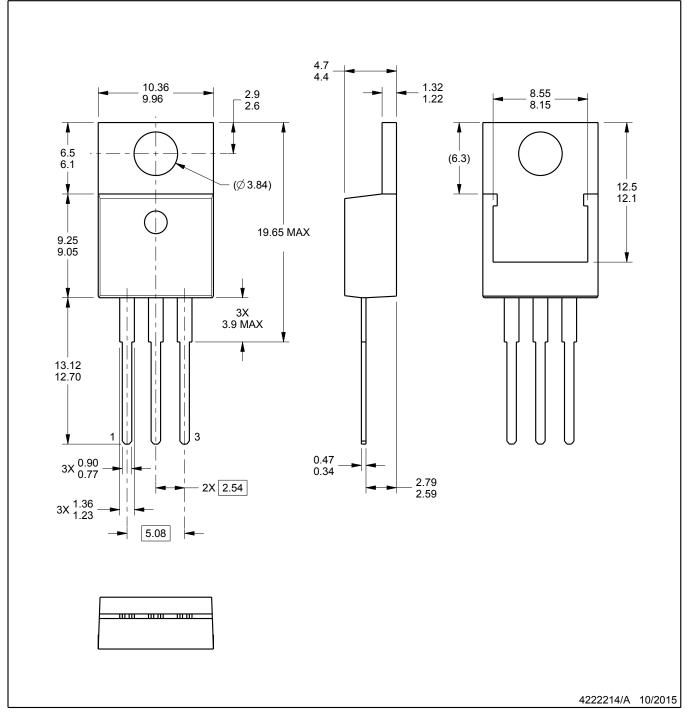

NOTES:

1. All controlling linear dimensions are in inches. Dimensions in brackets are in millimeters. Any dimension in brackets or parenthesis are for reference only. Dimensioning and tolerancing per ASME Y14.5M.

This drawing is subject to change without notice.
Reference JEDEC registration TO-220.




# KCS0003B

# **EXAMPLE BOARD LAYOUT**

# TO-220 - 19.65 mm max height


TO-220

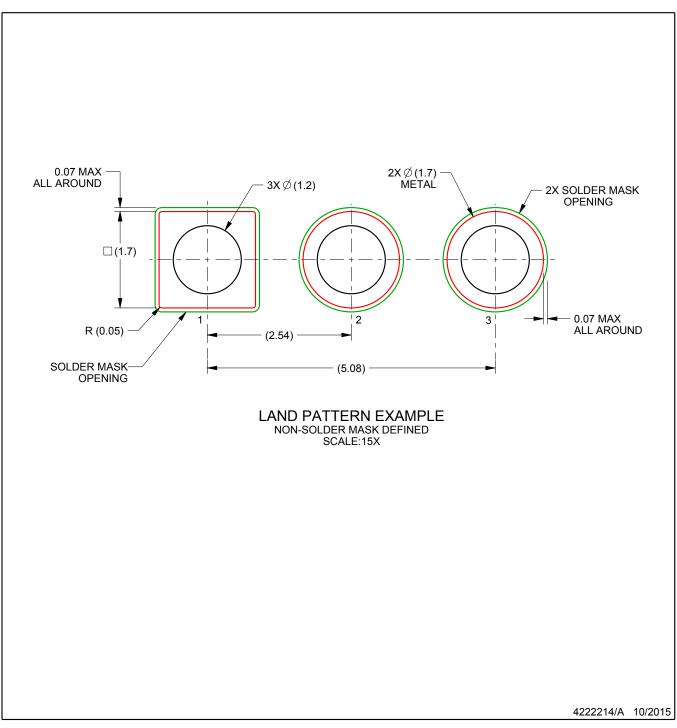



KC (R-PSFM-T3)

PLASTIC FLANGE-MOUNT PACKAGE

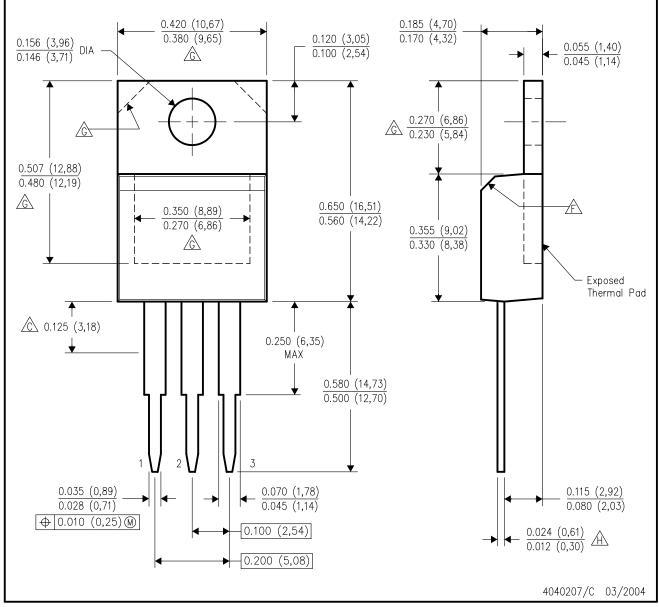

NOTES:

- A. All linear dimensions are in inches (millimeters).B. This drawing is subject to change without notice.
- Lead dimensions are not controlled within this area.

D. All lead dimensions apply before solder dip.

- E. The center lead is in electrical contact with the mounting tab.
- $\frown$  The chamfer is optional.
- A Thermal pad contour optional within these dimensions.
- $\triangle$  Falls within JEDEC TO-220 variation AB, except minimum lead thickness.



#### **IMPORTANT NOTICE**

Texas Instruments Incorporated and its subsidiaries (TI) reserve the right to make corrections, enhancements, improvements and other changes to its semiconductor products and services per JESD46, latest issue, and to discontinue any product or service per JESD48, latest issue. Buyers should obtain the latest relevant information before placing orders and should verify that such information is current and complete. All semiconductor products (also referred to herein as "components") are sold subject to TI's terms and conditions of sale supplied at the time of order acknowledgment.

TI warrants performance of its components to the specifications applicable at the time of sale, in accordance with the warranty in TI's terms and conditions of sale of semiconductor products. Testing and other quality control techniques are used to the extent TI deems necessary to support this warranty. Except where mandated by applicable law, testing of all parameters of each component is not necessarily performed.

TI assumes no liability for applications assistance or the design of Buyers' products. Buyers are responsible for their products and applications using TI components. To minimize the risks associated with Buyers' products and applications, Buyers should provide adequate design and operating safeguards.

TI does not warrant or represent that any license, either express or implied, is granted under any patent right, copyright, mask work right, or other intellectual property right relating to any combination, machine, or process in which TI components or services are used. Information published by TI regarding third-party products or services does not constitute a license to use such products or services or a warranty or endorsement thereof. Use of such information may require a license from a third party under the patents or other intellectual property of the third party, or a license from TI under the patents or other intellectual property of TI.

Reproduction of significant portions of TI information in TI data books or data sheets is permissible only if reproduction is without alteration and is accompanied by all associated warranties, conditions, limitations, and notices. TI is not responsible or liable for such altered documentation. Information of third parties may be subject to additional restrictions.

Resale of TI components or services with statements different from or beyond the parameters stated by TI for that component or service voids all express and any implied warranties for the associated TI component or service and is an unfair and deceptive business practice. TI is not responsible or liable for any such statements.

Buyer acknowledges and agrees that it is solely responsible for compliance with all legal, regulatory and safety-related requirements concerning its products, and any use of TI components in its applications, notwithstanding any applications-related information or support that may be provided by TI. Buyer represents and agrees that it has all the necessary expertise to create and implement safeguards which anticipate dangerous consequences of failures, monitor failures and their consequences, lessen the likelihood of failures that might cause harm and take appropriate remedial actions. Buyer will fully indemnify TI and its representatives against any damages arising out of the use of any TI components in safety-critical applications.

In some cases, TI components may be promoted specifically to facilitate safety-related applications. With such components, TI's goal is to help enable customers to design and create their own end-product solutions that meet applicable functional safety standards and requirements. Nonetheless, such components are subject to these terms.

No TI components are authorized for use in FDA Class III (or similar life-critical medical equipment) unless authorized officers of the parties have executed a special agreement specifically governing such use.

Only those TI components which TI has specifically designated as military grade or "enhanced plastic" are designed and intended for use in military/aerospace applications or environments. Buyer acknowledges and agrees that any military or aerospace use of TI components which have *not* been so designated is solely at the Buyer's risk, and that Buyer is solely responsible for compliance with all legal and regulatory requirements in connection with such use.

TI has specifically designated certain components as meeting ISO/TS16949 requirements, mainly for automotive use. In any case of use of non-designated products, TI will not be responsible for any failure to meet ISO/TS16949.

Products		Applications	
Audio	www.ti.com/audio	Automotive and Transportation	www.ti.com/automotive
Amplifiers	amplifier.ti.com	Communications and Telecom	www.ti.com/communications
Data Converters	dataconverter.ti.com	Computers and Peripherals	www.ti.com/computers
DLP® Products	www.dlp.com	Consumer Electronics	www.ti.com/consumer-apps
DSP	dsp.ti.com	Energy and Lighting	www.ti.com/energy
Clocks and Timers	www.ti.com/clocks	Industrial	www.ti.com/industrial
Interface	interface.ti.com	Medical	www.ti.com/medical
Logic	logic.ti.com	Security	www.ti.com/security
Power Mgmt	power.ti.com	Space, Avionics and Defense	www.ti.com/space-avionics-defense
Microcontrollers	microcontroller.ti.com	Video and Imaging	www.ti.com/video
RFID	www.ti-rfid.com		
OMAP Applications Processors	www.ti.com/omap	TI E2E Community	e2e.ti.com
Wireless Connectivity	www.ti.com/wirelessconnectivity		

Mailing Address: Texas Instruments, Post Office Box 655303, Dallas, Texas 75265 Copyright © 2015, Texas Instruments Incorporated