

## COMMON MODE CHOKE COILS / LFV TYPE

### FEATURES


- ◆ Wide inductance range
- ◆ Easy PC Board Mounting
- ◆ High levels of safety and reliability
- ◆ Available as vertically or horizontally mounted




### APPLICATIONS

- ◆ TV, VCR
- ◆ NC machines
- ◆ Peripheral units
- ◆ Computer systems
- ◆ Measuring instruments
- ◆ Switching power sources

### ORDERING CODE

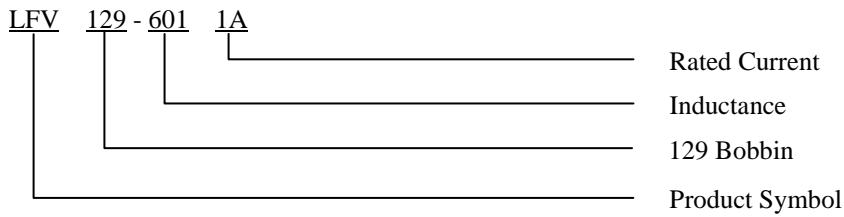

### SHAPES & DIMENSIONS (UNIT: mm)

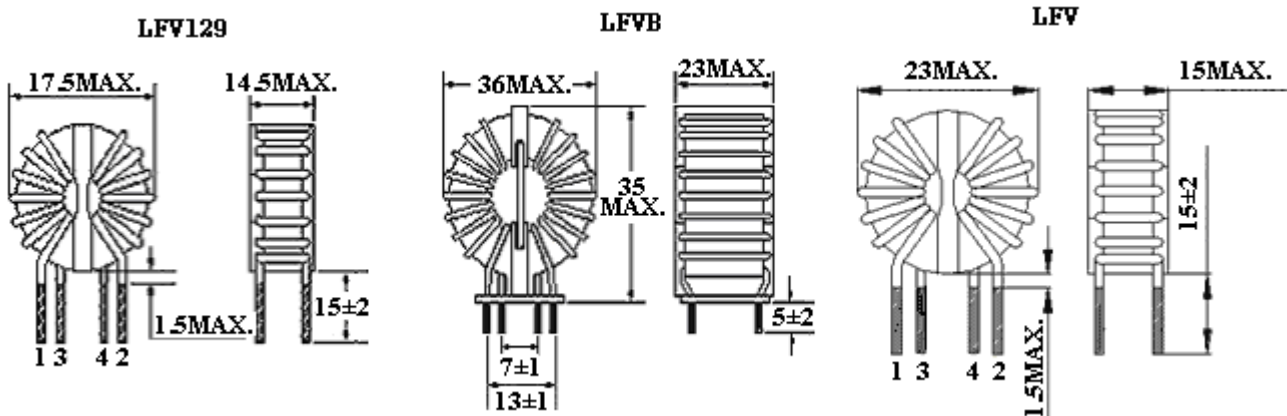

**CORE MASTER ENTERPRISE CO., LTD.**

<http://www.coremaster.com.tw>

## COMMON MODE CHOKE COILS / LFV TYPE

### ELECTRICAL CHARACTERISTICS

Part No.	Inductance (mH) (MIN)	DC Resistance (mΩ) MAX	Rated Current (A)
LFV129	0.6-5	30-150	1-3
LFVB	0.2-5	5-70	3-15
LFV	1.0-10	80-260	1-2

\*DESIGN AS CUSTOMER'S REQUESTED SPECIFICATIONS



**CORE MASTER ENTERPRISE CO., LTD.**

<http://www.coremaster.com.tw>