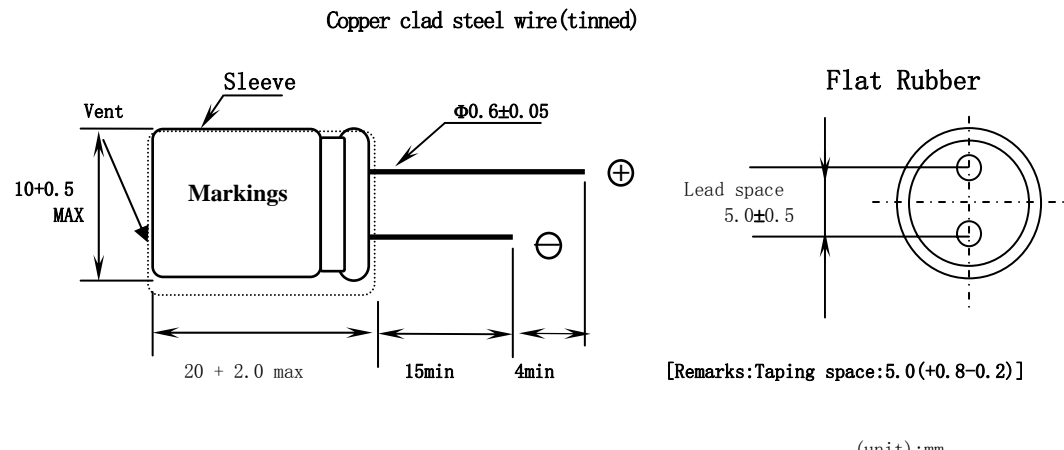


Aluminum Electrolytic Capacitor Specification

Series	KR1	100 V 100 μ F	Part No.	KR1-100V101MG200-T/A5.0
Customer No.	/		Case size	Φ D 10 X L 20
Specification	Items		Standard	
	Operating temperature range		- 40 ~ + 85 $^{\circ}$ C	
	Capacitance tolerance		\pm 20% (20 $^{\circ}$ C , 120Hz)	
	Dissipation factor (MAX)		(Less than) 0.08 (20 $^{\circ}$ C , 120Hz)	
	Leakage current (MAX)		(Less than) 100 μ A (20 $^{\circ}$ C 100 V 2 min)	
	Impedance (MAX)		\	
	Ripple current (MAX)		370 mArms (120Hz , 85 $^{\circ}$ C)	
	Load life		2000 hrs	
Outline	Sleeve color		Black	
	Marking color		White	
	(Dimensions)			
	<p>Copper clad steel wire(tinned)</p> 			
Recorder	(The first edition) : 2016-10-31			
Wrote by: LUOLI		Checked by: DINGCHANGHUA		Approved by: SHENZHIHONG