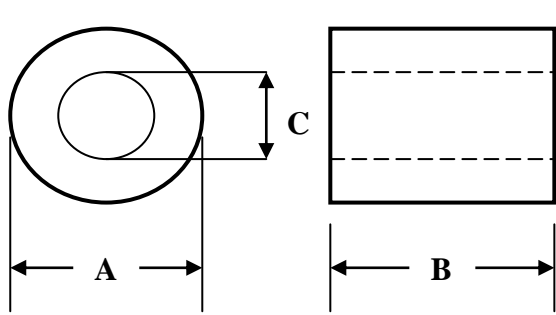


SPECIFICATION FOR APPROVAL

CUSTOMER :				DATE :	
PART NO : RH-9.3×9.6×3.8 (B8)				DWG.NO : CT5346073K5A	
CUSTOMER PART NO :				CUST.DWG.NO :	
(1)DIMENSION(UNIT:mm) 				A	9.3 ± 0.30 m/m
				B	9.6 ± 0.30 m/m
				C	3.8 ± 0.10 m/m
				D	
				E	
				F	
				G	
				H	
				I	
				J	
(2)ELECTRICAL REQUIREMENTS				(3)SCHEMATIC	
Z	MIN 40 OHM	TEST FREQ	25 MHz		
Z	MIN 75 OHM	TEST FREQ	100 MHz		
Z	MIN OHM	TEST FREQ	MHz		
Z	MIN OHM	TEST FREQ	MHz		
(4)TEST INSTRUMENTS					
HP4286A					
MATERIAL (ui)	800 ± 25%			APPROVED BY 吳載敏	
CORE	RH-9.3×9.6×3.8				
WIRE	2UEW φ 0.65 × 100mm			CHECKED BY 張明德	
WINDING	1 Ts			DRAWN BY LISA	

CORE MASTER ENTERPRISE CO., LTD.

TEL:886-2-8919-1288 FAX:886-2-8919-1298 WEB:www.coremaster.com.tw

TEST DATA

CUSTOMER :				DATE :					
PART NO : RH-9.3×9.6×3.8 (B8)				DWG.NO : CT5346073K5A					
CUSTOMER PART NO :				CUST.DWG.NO :					
IMPEDANCE				DIMENSION (UNIT : mm)					
FREQ	25 MHz	100 MHz		A	B	C			
SPEC	MIN 40 OHM	MIN 75 OHM		9.3 ± 0.3	9.6 ± 0.3	3.8 ± 0.1			
1	52	94		9.33	9.59	3.78			
2	52	95		9.35	9.58	3.83			
3	53	95		9.35	9.59	3.81			
4	52	94		9.35	9.58	3.79			
5	53	94		9.34	9.59	3.80			
6	52	94		9.34	9.60	3.79			
7	52	94		9.34	9.59	3.81			
8	52	95		9.34	9.60	3.81			
9	52	94		9.34	9.58	3.80			
10	52	94		9.35	9.59	3.81			
\bar{X}	52	94		9.34	9.59	3.80			
R	1	1		0.02	0.02	0.05			
REMARK: 產品不能有明顯缺陷、污損，產品缺口長、寬在 0.6mm 以下， 深度在 0.6mm 以下。							APPROVED BY 吳載敏		
							CHECKED BY 張明德		
							DRAWN BY LISA		

CORE MASTER ENTERPRISE CO., LTD.

TEL:886-2-8919-1288 FAX:886-2-8919-1298 WEB:www.coremaster.com.tw

RH-9.3×9.6×3.8 (B8)

